Jc923 U.S. PTO
11/03/00

Jc931 U.S. PTO
09/704803
11/03/00

Please type a plus sign (+) inside this box →

PTO/SB/05 (4/98)
Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office U S DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C F.R § 1 53(b))

Attorney Docket No.	/
First Inventor or Application Identifier	Gerd Krämer
Title	(Automatic Programming)
Express Mail Label No.	

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

1. [X] * Fee Transmittal Form *(e.g., PTO/SB/17)* *(Submit an original and a duplicate for fee processing)*
2. [X] Specification [Total Pages 32] *(preferred arrangement set forth below)*
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings *(if filed)*
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. [X] Drawing(s) *(35 U.S.C. 113)* [Total Sheets 19]
4. Oath or Declaration [Total Pages 3]
 - a [X] Newly executed (original or copy)
 - b. [] Copy from a prior application (37 CFR § 1.63(d)) *(for continuation/divisional with Box 16 completed)*
 - i. [] DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§ 1.63(d)(2) and 1.33(b).

5. [] Microfiche Computer Program *(Appendix)*
6. Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all necessary)*
 - a. [] Computer Readable Copy
 - b. [] Paper Copy (identical to computer copy)
 - c. [] Statement verifying identity of above copies

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ACCOMPANYING APPLICATION PARTS

7. [] Assignment Papers (cover sheet & document(s))
8. [] 37 CFR § 3.73(b) Statement *(when there is an assignee)* [] Power of Attorney
9. [X] English Translation Document *(if applicable)*
10. [] Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
11. [] Preliminary Amendment
12. [] Return Receipt Postcard (MPEP 503) *(Should be specifically itemized)*
13. [X] * Small Entity Statement(s) *(PTO/SB/09-12)* [] Statement filed in prior application, Status still proper and desired
14. [X] Certified Copy of Priority Document(s) 2 *(if foreign priority is claimed)*
15. [X] Other: Application Data Sheet

16. **If a CONTINUING APPLICATION,** *check appropriate box, and supply the requisite information below and in a preliminary amendment*

[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No _____/_____

Prior application information *Examiner* _____ *Group / Art Unit* _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

[] *Customer Number or Bar Code Label* *(Insert Customer No or Attach bar code label here)* or [X] *Correspondence address below*

Name	Gerd Krämer				
Address	Richard-Wagner-Str. 16				
City	Leimen	State		Zip Code	69181
Country	Germany	Telephone	06224-925326	Fax	0177-4238152

Name (Print/Type)	Gerd Krämer	Registration No (Attorney/Agent)	/
Signature	G. Krämer	Date	29.10.2000

Burden Hour Statement This form is estimated to take 0 2 hours to complete Time will vary depending upon the needs of the individual case Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

C931 U.S. PTO
09/704803
11/03/00

PTO/SB/17 (09-00)
Approved for use through 10/31/2002 OMB 0651-0032
U S Patent and Trademark Office, U S DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT ($) 354

Complete if Known	
Application Number	/
Filing Date	Priority 02. Nov. 1999
First Named Inventor	Gerd Krämer
Examiner Name	
Group Art Unit	
Attorney Docket No.	/

METHOD OF PAYMENT

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to
 Deposit Account Number: Kto: 2213818
 Deposit Account Name: BLZ: 66090800
 ☒ Charge Any Additional Fee Required Under 37 CFR 1 16 and 1 17
 ☒ Applicant claims small entity status See 37 CFR 1 27
2. ☒ **Payment Enclosed:**
 ☐ Check ☐ Credit card ☒ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code	Large Entity Fee ($)	Small Entity Fee Code	Small Entity Fee ($)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	345
106	320	206	160	Design filing fee	/
107	490	207	245	Plant filing fee	/
108	710	208	355	Reissue filing fee	/
114	150	214	75	Provisional filing fee	/

SUBTOTAL (1) ($) 345

2. EXTRA CLAIM FEES

		Extra Claims		Fee from below	Fee Paid
Total Claims	21	-20** = 1	X	9	= 9
Independent Claims	2	- 3** = —	X		= —
Multiple Dependent					= —

Large Entity Fee Code	Large Entity Fee ($)	Small Entity Fee Code	Small Entity Fee ($)	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	270	204	135	Multiple dependent claim, if not paid
109	80	209	40	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) ($) 354

**or number previously paid, if greater, For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code	Large Entity Fee ($)	Small Entity Fee Code	Small Entity Fee ($)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for *ex parte* reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1 129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1 129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) ($) 354

SUBMITTED BY				Complete (if applicable)	
Name (Print/Type)	Gerd Krämer	Registration No (Attorney/Agent)	/	Telephone	06224-925326
Signature	G. Krämer			Date	29.10.2000

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement This form is estimated to take 0 2 hours to complete Time will vary depending upon the needs of the individual case Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U S Patent and Trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO Assistant Commissioner for Patents, Washington, DC 20231

INVENTOR INFORMATION

Inventor One Given Name::	Gerhard Willy
Family Name::	Krämer
Postal Address Line One::	Richard Wagner Street 16
City::	Leimen
Country::	Germany
Postal or Zip Code::	D-69181
Citizenship Country::	Germany

CORRESPONDENCE INFORMATION

Name Line One::	Gerd Krämer
Address Line One::	Richard Wagner Str.16
City::	Leimen
Country::	Germany
Postal or Zip Code::	D-69181
Telephone One::	+49-06224-925326
Telephone Two::	+49-0177-4238152
Fax One::	+49-0177-4238152
Fax Two::	+49-06224-925326
Electronic Mail::	cybernetic@automatic-programming.com

APPLICATION INFORMATION

Title Line One::	Method for generating a simple kind of
Title Line Two::	Artificial Consciousness in a computer,
Title Line Three::	which has the capability to plan,
Title Line Four::	generate automatically and execute
Title Line Five::	machine-code for the solution of
Title Line Six::	arbitrary programming-abandonments.
Title Line Seven::	(Automatic Programming)
Total Drawing Sheets::	19
Formal Drawings?::	Yes
Application Type::	Utility

PRIOR FOREIGN APPLICATIONS

Foreign Application One::	199 52 587.0-53
Filing Date::	02. November 1999
Country::	Germany
Priority Claimed::	Yes

TITLE OF THE INVENTION:

Method for generating a simple kind of Artificial Consciousness in a computer, which has the capability to plan, generate automatically and execute machine-code for the solution of arbitrary programming-abandonments. (Automatic Programming)

REFERECES:

First announcement of this utility-patent "Verfahren zur Generierung einer einfachen Form künstlichen Bewußtseins im Computer zur Befähigung selbsttätig planender Erstellung von Maschinencode-Programmen und deren Ausführung zur Lösung beliebiger gestellter Programmier-aufgaben" was the 2nd November 1999 in Germany at the DPMA (deutsches Patent- und Markenamt = german Patent- and Trademark-Office).

SPONSORSHIP STATEMENT:

There was no sponsor for this invention and I'm a single independent inventor.

BACKGROUND OF THE INVENTION:

1. Field of the Invention:

The present invention relates to computer programming, and more particularly to automatic code generation. It relates also to learn-capable programs and artificial intelligence.

2. Present State of the Art:

Worldwide in the Field of Software-Development many employees are missing and the development tasks become larger and larger.
Until now a given conceptual formulation is conceived and programmed by Software-developers.
For relieving the programming there are "Wizards" which offer the possibility to generate basic parts of source-code after making interactive inputs on dialog-windows by a fixed given generator-scheme.
Moreover company-specific scripts are written, which generate simple steadily repeated parts of source-code with variations on the same positions by reading out data out of ASCII-files.

In every case the user first has to develop the generating script and then has to write the ASCII data for to read out, or - in the case of "Wizards" - has to make user defined inputs and after the generation of the frame-sourcecode has to develop the intrinsic functionality of the program.
After it the source-code has to be compiled to become executable. But such programs are not adaptive.

On the area of AI there are neuronal networks / fuzzy logic which can build expert-systems, which can absorb external attractions and have the capability to make adaptive decisions on these inputs, which means a kind of adaptive control system but they will not be able to plan and develop and execute machine-code an learn from its execution.

In the decision 20 W (pat) 12/76 of the german patent court artificial consciousness was tried to generated in a patent application by a reflexive chain of video cameras and monitors - this procedure has nothing to do with that method.

EP 0394760 A2

BRIEF SUMMARY OF THE INVENTION:

It's an object of the invention to create computer based artificial consciousness.

It is another object of the present invention to provide a method for giving a computer the capability to learn programming for itself.

It's a further object of the invention to provide a system to make a computer plan and develop programs targeted to a pregiven programming-aim or to fulfill its basic needs.

Therefore it first captures all processor exception-vectors (for a single process-system) or task exception-vectors (for a multitasking version) by own analysis-routines.

Then the system generates numbers, puts them to a defined place in memory and then sets the instruction-pointer to that number for to execute it, like it would be a legal opcode.

Before the number is executed the processor's registers are set to predefined initial conditions and one number is executed several times using different initial conditions.

After every number-execution the system analyses, if an exception occurred or the number caused a jump or a write to memory and the concerned source- and destination-registers are determined and also the kind of instruction, which means its mnemonic. For every execution many theoretical source-registers and several possible commands are possible. Therefore one number is executed by

many predefined different initial conditions to determine the concerned source-register and operation most exactly. By the sum of the execution analysis data the command concerned mnemonic and the source- and destination-registers are determined. So the system itself learns to program in machine-code.

Additional the absolute basic needs, which also have mono-cellars, are modelled:
Pain means an attack to the program (=overwrite) and hunger means loss of energy, which is modelled by a defined register (hunger=low values).

The program has got two valuation-systems: one concerning the basic needs and one concerning the fulfillment of pregiven programming aim.

After single numbers are executed two-number-combinations are executed and the effects of these combinations are determined.

The valuation system determines if the combination is good or worse concerning the basic needs and the fulfillment of a pregiven programming-aim (it's possible to disable one of these two valuation-systems).

The programming-aim concerning valuation-function is dynamic, which means the value-range of its valuation-results is valuated by a meta-valuation-system - and if the valuation-results are not very meaningful, which means, they're clustered near the min/max-boundaries or near zero or another value, the valuation-function is changed by the valuation-system itself and a revaluation occurs. If then the valuations results are worse than before, the modification is quashed and another valuation-function modification is tried until the revaluation results in unclustered valuation-results.

When larger number-combinations are tried, the valuation-system omits to combine combinations which caused fatal exceptions, large jumps, extensive writing to memory, registers which should not be used, etc. or combinations which dislodge from the programming-aim. So not every additional number or combination in the total combination causes an exponential rise of needed calculation-time and disc-space.

The larger the combination becomes the more restrictive is the programming-aim specific valuation-system concerning additional numbers=opcodes or combinations. Then additional combinations must appropriate the programming-aim.

So the system learns to plan developing the desired routine.
The solution-routines are retested by nearly all possible input-values and if it works fine it's

valuated by needed clock cycles and memory space and the most effective solution-routine then is disassembled and can be taken by developers to implement it into their projects as a subroutine.

BRIEF DESCRIPTION OF THE DRAWINGS:

Fig.1 shows the ER-diagram of the database-tables which contain the data of the AC-program. The in the middle shown CLT(i)–tables are created dynamically. The database is described in section 1.3.2.

Fig.2–18 show the names, datatypes, value-range and meanings of the table's columns - some with additional examples, how they're filled. These tables are described in sections 1.3.2.1 to 1.3.2.16.

Fig.19–21 show the value-assignments of the OxT and CxT–tables. Here the effects of the executions are analyzed, and the mnemonic and source+destination-registers are determined.

Fig.22 shows the value-assignments of the energyspecific tables ELT and EBT, which provide the analysis results of the actions concerning the modelled hunger.

Fig.23–24 show the flow-chart of the AC-program.

DETAILED DESCRIPION OF THE INVENTION:

Contents:

1. SPECIFICATION 7
1.1 Object of the invention 7
1.2 Derivation of technical feasibility and Definition of artificial Consciousness 7
1.2.1 Philosophical basic liberations 7
1.2.2 Basic Approach for the Generation of Artificial Consciousness 8
1.3. Technical Doctrine how to generate Artificial Consciousness 8
1.3.0 Definition of the appropriated abbreviations 8
1.3.1 Procedure for generating artificial consciousness by comprehensible words 11
1.3.2 Creating the Database of the AC-Knowledge 11
1.3.2.1 The Register-Identifikation-Table [RIT - Fig.2] 11
1.3.2.2 The Operation-Identification-Table [OIT - Fig.4] 12
1.3.2.3 The Initial-Condition-Table [ICT - Fig.3] 12

1.3.2.4 The OpCode-Register-Table [ORT - Fig.5] 12
1.3.2.5 The OpCode-Learn-Table [OLT - Fig.6] 13
1.3.2.6 The OpCode-BaseTable [OBT - Fig.7] 13
1.3.2.7 The Combinations-RegisterTables [CRT(i) - Fig.8] 13
1.3.2.8 The Combinations-LearnTables [CLT(i) - Fig.9] 13
1.3.2.9 The Combinations-Base-Tables [CBT(i) - Fig.10] 13
1.3.2.10 The Aim Solution Table [AST - Fig.11] 14
1.3.2.11 The Aim Description Table [ADT - Fig.12] 14
1.3.2.12 The Function-Identification-Table [FIT - Fig.13,14] 14
1.3.2.13 The Valuation-Function-Table [VFT - Fig.15] 14
1.3.2.14 The Status of the AC-Program [SAC - Fig.16] 15
1.3.2.15 The Energy-Learn-Table [ELT - Fig.17] 15
1.3.2.16 The Energy-Base-Table [EBT - Fig.18] 15
1.3.3 Preparing the initial State of the System 15
1.3.4 Base-learning from execution of all single opcodes 16
1.3.4.1 OpCode generation and execution 16
1.3.4.2 Analysis of opcode-repercussion and saving the analysis-result 17
1.3.5 Realisation of the basic needs 18
1.3.5.1 Realisation of artificial pain 18
1.3.5.2 Realisation of artificial hunger 19
1.3.6 Planning on the criterions of the valuation-system 19
1.3.7 The dynamic-reflexive valuation-system 20
1.3.7.1 Valuation of the programming-aim closeness 20
1.3.7.2 The dynamic energy-valuation-function 21
1.3.8 Reaching Self-Consciousness, Reproduction and Evolution 22
1.4. Conceptual Formulation of the Programming-Aim and Examples of Achievement 22
1.4.1 Example_1: Developing a Program to compute the average 22
1.4.2 Example_2: generation of a programs for computation of the cube-root 23
1.5. Needed Hard-disk-Space and Oblivion 24
1.5.1 Table sizes 24
1.5.2 Oblivion 25
1.6. Becoming Conscious 25
1.7. Presentment of the Economic Advantages 25
2. CLAIMS 27
ABSTRACT OF THE DISCLOSURE 32
3. DRAWINGS 1
3.1 Relational Database of the AC-knowledge 1
3.1.1 Fig.1 - ER-Diagram of the AC-Database 1
3.1.2 Tables of the AC-Database 2

EP 0 636 256 B1

Fig.2 - Register-Identification-Table 2
Fig.3 - Initial-Conditions-Table 2
Fig.4 - Operation-Identification-Table 3
Fig.5 - OpCode-Register-Table 5
Fig.6 - OpCode-Learn-Table 5
Fig.7 - OpCode-Base-Table 6
Fig.8 - Combination-Register-Table 7
Fig.9 - Combinations-Learn-Table 7
Fig.10 - Combinations-Base-Table 7
Programming-aim and valuation-function tables 8
Fig.11 - Aim-Solution-Table 8
Fig.12 - Aim-Description-Table 8
Fig.13 - Functions-Identification-Table (for SQL-functions) 8
Fig.14 - Functions-Identification-Table (for machine-code functions) 10
Fig.15 - Valuation-Function-Table 11
Fig.16 - Status of the Artificial Consciousness 11
Fig.17 - Energy-Learn-Table 12
Fig.18 - Energy-Base-Table 12
3.2 Flowchart of the AC-Program 13
3.2.1 CxT(i) value assignments 13
Fig.19 - ORT & CRT(i) value assingments 13
Fig.20 - OLT & CLT(i) value assingments 13
Fig.21 - OBT & CBT(i) value-assingments 14
3.2.2 Fig.22 - ELT and EBT value-assignments 15
3.2.3 Fig.23 - Definitions needed to read the flowchart 15
3.2.4 AC-flowchart 16
Fig.24a - Initial Preparations 16
Fig.24b - Base-Learning 17
Fig.24c - Double-OpCode-Acting 18
Fig.24d - Triple-OpCode-Planning 19

Copyright © 2006 by Norbert Wiener

1. SPECIFICATION

1.1 Object of the invention:

The objects of the invention are:

a) to provide automatized software-development,

b) to create computerbased artificial consciousness.

With this method a simple form of artificial consciousness is generated using a computer, which acts aimless and arbitrarily in the beginning, but has the capability to learn from the effects of all its "behaviour", for to, when it knows the effects of every single behaviour or behaviour pattern (=combination), has the capability to join together its single actions targeting to a given aim or fulfilment of basic needs.

EP 0 394 263 B1

1.2 Derivation of technical feasibility and Definition of artificial Consciousness:

1.2.1 Philosophical basic liberations:

(... are normally no ingredient of a patent specification, but indispensable for the explanation of the technical feasibility)

If the prerequisite of consciousness of man would be a kind of soul which would be adventitious between cygot and birth, it world be possible to locate it by cogitation experiment:

If you would cognitive cut the head and provide the carotids with oxygen and nutrient containing blood, the consciousness would surely be located in the head.

If you would isolate the brain expect of the factitious supply, no conventionally information flow between the individual and the environment would be possible, but the "I am"-consciousness would surely be present.

Over it it's theoretical now possible to cut the cerebral lappets for seeing, listening, smelling, tasting, feeling, equilibration, speech and the cerebellum and nothing more would be lost.

If the front cerebral lappets would further be cut, you'd loose the possibility to compute with present knowledge and on the cut of several upper cerebral lappets you'd loose reminiscence, but the deepest basic "I am" would be remaining.

⇒ If a kind of soul would exist, it would be located on the upper End of the phylum brain ##.

Under consideration of the fluent evolution the primates would have a "soul" too; and other mammals too; and all other animals too; and the single-cellars too; and plants too; and consequently every cell of a multicellular life form too.

⇒ A border of a "soul-adventitious" or an "I am"-consciousness between the life forms is

missing.

⇒ Every cell of our body ought have its own soul (the evolutionary specialisation to neural-cells is, equivalent to the prenatal cell-fissions, fluent).

⇒ A soul does not exist (it's not necessary to build consciousness).

⇒ Consciousness originates during the evolution compulsively automatically.

⇒ Inside the "dead" molecule of the DNA is the construction plan for generating consciousness.

⇒ Consciousness originates by valuation of the own actions and its effects, with the reflection of the valuation-results on the adapting dynamic valuation-method.

⇒ If no soul is necessary for generating consciousness, but only the complex "program" of DNA, then consciousness is also generatable by a complex reflexive computer-program.

1.2.2 Basic Approach for the Generation of Artificial Consciousness:

The doing of all, including the plainest individuals conduces the fruition of its basic needs.
These basic needs are:

a) no achiness := no attack against the own system *and*
b) no hunger := no imminent loss of energy

A complex program, in which these basic needs are modelled, and which can act freely and has the possibility to learn reflexively what its actions effectuate (like a child) and can reflect if its actions improves its situation in reference to its basic needs, builds up a valuation-system, an then plans with the actions from its learned knowledge and reflects again and so attains consciousness. When it later scans its own machine-code and then tests every of its opcodes and after it all opcode-combinations it discerns the effect of its opcode-combinations and their context and so attains self-consciousness and now has the possibility of self-reproduction and the aware improvement of its machine-code while reproduction and so starts its evolution (its so effective like man could improve its DNA while mitoses/meiosis implementing its experience of life).

1.3. Technical Doctrine how to generate Artificial Consciousness:

1.3.0 Definition of the appropriated abbreviations:

The programming works on every computer with any processor and on any operating-system. In the following μ-indexed abbreviations correlate with Motorola processors, π means Intel processors, and ψ-indexed denote PowerPC-RISC-Processors.

eq. = equivalent

ASR_{ψ} = Adress Space Register

BAT_{ψ} = BAT-Registers

BC = BitCode: every Bit correlates with a Flag and combinations are allowed.

CCR_{μ} = Condition-Code-Register (=Flags: EXtension, Negative-, Zero-, Overflow-, Carry-)

CISC = Complex-InstructionSet Computer (p.e. IA_{π} and MC_{μ})

CPU = Central processing unit = Prozessor

CR_{ψ} = Condition-Register (CR 0..7)

CR_{π} = Control-Register

CTR_{ψ} = Count-Register

$DABR_{\psi}$ = Data Adress Breakpoint Register

DAR_{ψ} = Data Adress Register

DB = DataBase

DEC_{ψ} = Decrement-Register

DR_{π} = Debug-Register

$DSISR_{\psi}$ = DSI Status-Register shows the reason for DSI- and Alignment-Exceptions.

EA = Effective Adress (memory access without using a register)

EAR_{ψ} = External Access Register

$Rseg_{\pi}$ = Segment Register: CS; SS; DS, ES, FS, GS

$EFlags_{\pi}$ = 32-Bit-Register with the System-Flags: IDent-, VirtualInterruptPending-, VirtualInterruptFlag-, AlignmentCheck-, Virtual8086Mode-, ResumeFlag-, NestedTask, InputOutputPrivilegeLevel, OverflowFlag, DirectionFlag, InterruptEnableFlag, TrapFlag, SignFlag, ZeroFlag, Auxiliary/Align-CarryFlag, ParityFlag, CarryFlag.

EIP_{π} = Extended Instruction Pointer ($\triangleq PC_{\mu}$)

ER = Entity Relationship (database-model)

ESP_{π} = Extended StackPointer ($\triangleq USP_{\mu}$)

Exc. = *Exception*$_{\pi}$: #DevideError, #DeBug, NMI IRQ, #BreakPoint, #OverFlow, #BoundRange exceeded, #UD (Invalid Opcode), #NM (device not available), #DoubleFault, invalid #TaskSwitch, Segment #NotPresent, #SS (StackFault), #GeneralProtection, #PageFault, #MF (FloatingPoint-Error), #AlignmentCheck, #MachineCheck.

Exception$_{\mu}$: Reset, BusError, AdressError, invalidOpCode, Div/0, CHK, TrapV, PrivilegeViolation, Trace, Interrupts, Traps.

Exception$_{\psi}$: System-Reset, Machine-Check, DSI, ISI, Ext.Interrupt, Alignment, Program, Floating-Point unavailable, Decrementer, System Call, Trace, Floating-Point Assist.

FFT = fast Fourier-Transformation

FK = Foreign Key of a ER-Database-table

FPR_{ψ} = Floating-Point Register 0..31

$FPSCR_{\psi}$ = Floating-Point Status and Control Register

GB = GigaBytes = 2^{30} Bytes

Copyright © 1994 Data Becker GmbH

GPR = General Purpose Registers: on Pentium$_\pi$: EAX, EBX, ECX, EDX; ESI, EDI, EBP; ESP; EIP : on PowerPC$_\psi$: GPR 0..31 ; and on Motorola$_\mu$ the Data- and Adress-Registers.

IA = Intel-Architecture

IRQ = Interrupt-Request

AC = Artificial Consciousness

kB = kiloBytes = 2^{10} Bytes

ld = Logarithm dualis = $\log_2$

LR_ψ = Link-Register

MB = MegaBytes = 2^{20} Bytes

MSR_π = Model Specific Register

MSR_ψ = Machine State Register

NMI = Non-Maskable-Interrupt (highest Interrupt)

NOP = NoOperartion-OpCode [=opcode without effect (except increment of IP_π/PC_μ)]

OLB = OpCode Lower Byte = last byte in the opcode

PC_μ = Program-Counter (=Pointer to the first byte in memory where the processor starts to fetch and execute an opcode)

PK = Primary Key of a ER-database-table

PVR_ψ = Processor Version Register

RISC = Reduced-InstructionSet Computer (p.e. PowerPC$_\psi$)

RTE_μ = instruction: return from exception (loads SR and PC from Supervisor-Stack)

$SDR1_\psi$ = SDR1-Register

$SPRG_\psi$ = SPRG 0..3

SR_μ = StatusRegister (Flags$_\mu$: Trace-, Supervisor-, +Interrupt-Maske: I_2 I_1 I_0, +**CCR**-Flags)

SR_π = Segment Registers: CS, DS, SS, ES, FS, GS

SR_ψ = Segment Registers

SRR_ψ = Save/Restore-Register of Machine-Status

SSP_μ = Supervisor-StackPointer (A7 in Supervisor-Modus)

TB_π = Time Base Facility: Time-Counter $\rightarrow 2^{64}$-1

TR_π = Table-Register: GDTR, IDTR, LDTR, TR

USP_μ = User-StackPointer (Aderessregister A7 in User-Mode, A7' in Supervisor-Mode)

$\triangleq$ = correlates

$ = begin of a hexadecimal number

ζ = result of bit-by-bit-AND over all following values [$= V_1 \,\&\, V_2 \,\&\, \ldots. \,\&\, V_n$]

Ξ = result of bit-by-bit-OR over all following values [$= V_1 \mid V_2 \mid \ldots. \mid V_n$]

Υ = number (sum) of the set Bits in the following value [$= (1\&V) + (2\&V)/2 + (4\&V)/4 + \ldots$]

$\forall$ = for all of the following ...

$\forall^-$ = for all other ... (except the following)

1.3.1 Procedure for generating artificial consciousness by comprehensible words:

A computer system attains consciousness, if the active program, in which basic needs are modelled (see 1.3.5), has captured all exception-vectors and proceeds as follows:
Generate a normal number, write it somewhere in the memory, put the program-counter = instruction-pointer on it and execute it like it would be an opcode (=machine-code-command) and analyze, what its execution caused and proceed so with all numbers→opcodes (until a maximum length) with many representative initial conditions (register-values and reference-contents of address-registers).
Then use the saved opcodes which seldom caused an exception while using several initial conditions and evaluate if its execution increased or decreased its situation in due to its basic needs.
Combine the opcodes, which didn't decrease the own situation, and evaluate the effects of the code-combination using several initial conditions and save the result of analysis.
Plan combinations of those opcode-combinations which would increase the well being referable to the basic needs or could fulfill or approximate a given programming aim.

Copyright by Thomas Ehrhardt

1.3.2 Creating the Database of the AC-Knowledge:

For to have the learned from actions persistent, and for to have convenient access to the large quantity of data, a relational database system with its tables and relations shown in 3.1 is created. For to increase access and to save hard disk capacity, equivalent primary keys in clusters and additional indexes for often used non-PK-rows. The ER diagram is shown in Fig.1.
Processor-dependant and in dependence of the number of 32-Bit-OpCodes, the database can grow very large and so the access speed according to it slow. Therefore RISC-Processors are more applicatively for the AC-Procedure than CISC-Processors. But CISC-Processors, like in the IA, use not very much opcodes which are longer than 24 bit, wherefore it's possible to have with striped tables and additional index-hard-disks and a higher "obliviousness" on inefficient opcode-combinations, an acceptable performance too.
The hard disc space problem in discussed in 1.5.

1.3.2.1 The Register-Identifikation-Table [RIT - Fig.2]:

In the RIT the individual descriptors of the processor-registers and -vectors are typed first: Every Register gets a correlated identification-number, an assigned bit in the BitCode, a character describing the register-type, a consecutive number of the register-type and an optional description of the register. The register of the processor-flags ($EFlags_{\pi}/SR_{\mu}$) gets the Register_ID #0. The exception-vectors mostly are located in memory and are no internal processor-registers - to identify most of these important vectors they get a Register_ID with negative sign, which correlates with

the exception-number. [If exception #0 is not RESET but a real exception, then all exception-vector Register_IDs are displaced by 1: *Register_ID* = −(ExceptionNr + 1).]
Fig.2b shows a Motorola example of the RIT.

1.3.2.2 The Operation-Identification-Table [OIT - Fig.4]:

Like in the RIT the registers, here in the OIT the most important operations get an identification number and a bit in a BitCode.
The *Operation_Type* pigeonholes the operation to an operation group, described in Fig.4c.
The *Operation_Mnemonic* (needn't to be exact like using assembler) and the optional *Operation_Description* describe the basic command.

1.3.2.3 The Initial-Condition-Table [ICT - Fig.3]:

Because of equal opcodes could cause different effects, in this table many representative initial conditions referring to all positive Register_IDs are pregiven here. For every initial condition number (in the fig.3-example: -31..+30) for all positive *Register_IDs* a sample of initial conditions is generated, p.e. using the Function in Fig.3b. But only for all registers, which could contain mathematically used numbers, like data-registers, address-register-references and in the decremented reference of it [to include the command −(adr.reg.)], floating-point-registers and other special calculation-register (like p.e. MMX).
With the content of the address-registers it's surely possible to calculate too, but their values mostly refer to values in memory, where the predefined reference-values of the are located. Therefore the initial conditions of the address-register-values should only gyrate circadian through the references.
The $Status_{\mu}$/$EFlags_{\pi}$-Register higher bytes are always filled with the same initial conditions from SAC.*actual_Processor_Mode*. The ConditionCodes in the lowest byte of $Status_{\mu}$/$EFlags_{\pi}$ have got variable initial conditions. With the Control-, Debug- and Machinestate-Registers and the other special registers is dealt carefully too - the always get the same default-values.

1.3.2.4 The OpCode-Register-Table [ORT - Fig.5]:

For every form initial values by opcode-execution changed (destination-) register, in a loop over all possible source-registers it's ascertained which possible operation-types of the OIT could caused the value in the changed (destination-) register.
For every appropriate source-destination-register-combination a table-entry is generated (unitary operators get the *Register_ID_source* = -1) and for every matching operation-type between possible source and destination the OIT-belonging *Operations_BitCode*-bit is set [p.e. 2 + 2 = 2 * 2 = 2^2 = 2<<1 = 2|4 = ... = 4 for one or two source registers 2 (the other could be a constant) and one destination-register 4].
The ORT-columns are described in fig.5 and fig.19 contains the value-assignment-algorithms.

1.3.2.5 The OpCode-Learn-Table [OLT - Fig.6]:

The OLT is a subsumption of the effects of the actual opcode on the various used initial conditions. In the first 6 columns informations of fatal effects of opcode-execution are collected. Then there's the difference between the instruction-pointer=program-counter –value after and before opcode-execution and after it the condition-codes which could have caused a jump [redundant to ICT.*Register_Value*(*Register_ID*=0)].

Then in *Register_changed_BitCode* and *Register_source_BitCode* the Bits of all possible destination- and source-registers follow out of the belonging ORT-entries and after it in *max_Operation_BitCode* and *min_Operation_BitCode* the bitwise *OR*ed and *AND*ed BitCodes of the ORT.*Operations_BitCode* -Entries.

The duration and time of opcode-execution are stored, and in *aim_valuation* analog VFT.*Valuation_Function*(ADT.*aim_Valuation_FunctionID*) it's appraised, how valuable the opcode-execution is in reference to reaching the programming-aim (value-assignment is shown in fig.20).

1.3.2.6 The OpCode-BaseTable [OBT - Fig.7]:

The opcode-base-table shows the ascertained total effect of one opcode in reference to all initial conditions. Fig.21 explains, how the evaluation (column-filling) happens, for so getting a "warrant of apprehension" of the opcode.

The OBT contains the resume of all executions of the opcodes, which later is necessary for the aim-directed planning of code combinations.

1.3.2.7 The Combinations-RegisterTables [CRT(i) - Fig.8]:

The Combinations-RegisterTables are created dynamically, built analog the ORT, with the difference, that effects of opcode-combinations are analysed here. So the CBT(2) has got one more opcode in the primary key than the OBT=CBT(1), and CBT(3) has got three opcodes, etc.

1.3.2.8 The Combinations-LearnTables [CLT(i) - Fig.9]:

Here the same is valid, like in the CRT(i). Analogous the OLT, one CLT(i)-row contains the effects of one opcode-combination in reference of the used initial conditions.

Here first the column *CLT(i).gradient_aim_valuation* gains importance. While it was identical to *aim_valuation* in CLT(1)=OLT, in CLT(i≥2) it contains: *CLT(i).aim_valuation – CLT(i-1).aim_valuation* (see third line of fig.20).

1.3.2.9 The Combinations-Base-Tables [CBT(i) - Fig.10]:

Analogous the CBT(i) show the resume of the effects of all initial conditions in reference to one opcode-combination. The value-assignments are shown in fig.21. CBT(n) (where n is the largest i) is the combination-plan-table - it's the place where the aim-solution-program originates.

If *ADT.aim_fullfilled_Flag_Function(CPT-PK)*=1 (TRUE), the solution-program of the given aim is found and it'll be enrolled into the AST.

1.3.2.10 *The Aim Solution Table [AST - Fig.11]:*

For every given programming abandonment the found solution-programs, their lengths, execution-times and used registers and operations (→bitcodes) are enrolled here.

1.3.2.11 *The Aim Description Table [ADT - Fig.12]:*

The ADT assigns to every programming aim an identification-number, a short description, one bitcode-combination of the source- and one of the destination-registers which should be used (if possible) and one bitcode-combination of forbidden source- and one of forbidden destination-registers; further a string of former solution-programs which could be implemented, and a aim-solution-flagfunction which returns TRUE if the opcode-combination (program) solves the problem for the desired source- and destination-registers and finally an identifier which references to the valuation_function in the VFT, that appraises the closeness to the complying programming-aim, which is among others dependant of this aim-solution-flagfunction.

1.3.2.12 *The Function-Identification-Table [FIT - Fig.13,14]:*

In the FIT basic subfunctions are provided, which can be used for composing the energy valuation-function.

It's introduced in two variations:

a.) for generating a dynamical valuation function in SQL,

b.) for generating a dynamical valuation function in machine-code.

The alterable building of a valuation function is easier to accomplish in SQL, but the execution-time in machine-code is much faster and every new composed SQL-valuation-function has to be parsed again.

In the future the valuation-function should only be composed in machine-code. This has the additional advantage that the AC-program could use some solved solution-functions again as subfunctions in the FIT for later use for composing the valuation-function.

1.3.2.13 *The Valuation-Function-Table [VFT - Fig.15]:*

The VFT contains the dynamic valuation-system in reference to the own "well being" (energy-register) and to the closeness to the programming aim(s).

The VFT.*Valuation_Function*(Type='E', SAC.Energy_Valuation_Function_ID) appraises energyspecific actions and the *Valuation_Function*(Type='A', SAC.Aim_Valuation_FunctionID) the closeness to the programming aim(s).

The VFT.*Function_ID_Chain* contains the concatenation of the FIT.Function_ID's, that means the execution-chain of the subfunctions: Here causes NUM (see fig.13b), that the following value is used as a number of byte-length, VALUE denotes that the following value is the column-number of the CPT=CLT(n), from which actual row the value is taken, EREG means the Register_ID of the energy-register, S/D_REG denotes the value out of ADT.all_source/dest_Registers_BitCode and AIM_F is the

result of the ADT.aim_fulfilled_Flag_Function. The unitary operations operate on the last result of the Function_ID_Chain and the binary operations on the last two results.
On every accommodation, enhancement, or other amelioration of these valuation-functions the *Valuation_Function_ID* is incremented and a new entry with the modified *Valuation_Function* is created and the efficiency of all valuation-functions are reappraised:
VFT.*Valuation_Function_value* = SAC.*Energy/Aim_self_valuation_Func(...)*], for to have an efficiency-gradient for further improvements.
The functionality of the dynamic valuation-system is described in 1.3.7.

1.3.2.14 The Status of the AC-Program [SAC - Fig.16]:

This table has no primary key and only one row. It contains status-informations of the AC-Program and two self-valuation-functions, which appraise the efficiency of the energy-valuation-function and of the valuation-function of the programming-aim-closeness (VFT) by evaluating the range of their valuation-results.
These self-valuation-functions are, in opposite to the energy- and aim-closeness valuation-functions, not modifiable by the AC-program itself, but can be changed by the user.

1.3.2.15 The Energy-Learn-Table [ELT - Fig.17]:

In the ELT data are stored about all energy relevant actions over the actual initial conditions, that means for all opcodes and code-combinations, which pertain the last data-register.
The valuability of an energyspecific action is appraised according to ELT.*Energy_valuation* = VFT.*Valuation_Function*(SAC.*Energy_Valuation_Func_ID*).

1.3.2.16 The Energy-Base-Table [EBT - Fig.18]:

Like in the CBT(i) for programming-aim-closeness, in the EBT the effects of energy-changing opcode-combinations for all initial conditions are collected.

1.3.3 Preparing the initial State of the System

For to reset the system later into the initial state without booting, several pointers have to be latched. Afterwards all exception-vectors are intercepted by own routines, because of the initial trying to use arbitrary numbers as machine-opcodes, although many of these trying cause fatal exceptions, because they're illegal opcodes (not usable) or the opcode causes an exception on one of the initial conditions. Abnormal system end would be the consequence, if not all exception-vectors would be captured.

In the case that the AC-program should run preclusively, you'll have to
a.) stop multitasking by disabling it by an operating-system routine or by setting the IRQ-mask of

the processor to NMI.

b.) save all system-exception-vectors.

c.) set all system-exception-vectors to own analysing and handling routines.

or if it should later run with other programs or perhaps with further AC-programs:

a') increase own task-priority.

b') save all task-exception-vectors.

c') set the task-exception-vectors of the AC-program to own analysing and handling routines.

d.) save the statusregister$_{\mu}$ ($\triangleq$EFlags$_{\pi}$) and the user-stackpointer.

e.) save the values of the other address-registers and of the data-registers.

f.) save the values of the segment-, control-, debug- and special-registers.

g.) set exception-vectors, which load additional data to the supervisor-stack (p.e. on address-violation-exception several processors load additional information like access-address and opcode onto the supervisor-stack) to a this fact considering interceptor-routine.

h.) set the privilege-violation–exception-vector to a special capturing routine.

i.) set one trap-vector to a routine, where the system should continue inside the supervisor-mode after this trap occurs.

j.) execute this trap intentionally to change the CPU-mode from user-mode to supervisor-mode (the system now continues on the above set routine).

k.) set the trace-exception-vector to an own trace-routine for later effect-analysis after number-as-opcode execution.

l.) set the bits in the first word on the supervisor-stack so, that when the SR is loaded from SSP, the trace-Flag is set and the IRQ-mask is set to NMI (p.e. this is #$8700 on Motorola) because while the following base-opcode-learning no interrupt should be possible and after execution the effects should be analysed.

See referring to this fig.24a.

1.3.4 Base-learning from execution of all single opcodes:

1.3.4.1 OpCode generation and execution:

a.) Generate a 32-Bit-Number as an opcode, starting on #$0000.0000, later increase by 1. [if you already know the CPU instruction set, you can skip the opcodes which would overwrite memory (p.e. memory-move-commands).]

b.) Set data- and address-registers, and the address-register destination-values and the values one DWord below on predefined test-values (initial conditions) and clear the condition-codes in EFlags$_{\pi}$/CR$_{\mu\psi}$ (or use several initial conditions too).

c.) Write the above generated opcode into the test-location in memory. Then fill the memory behind with zeros up to the maximum possible opcode-length, if zeros mean the mnemonic

"ORI #0, Reg.0" (or another effectless command) or fill with NOPs.

This is necessary because on a long command the zeros are not meaningless [and then often less destroying (p.e. memory overwriting) than the NOP-corresponding opcode-number], and on a few processors a clearing of the trace-flag is possible in the while execution used user-mode too, which effects the execution of the following numbers as opcodes too [if now the zeros are not effectless, NOPs have to be used to prevent further effects (like memory- or program-selfoverwriting)].

After these zeros or NOPs the Trace-Bit-Cleared handler is following.

d.) Set content of the supervisor-stack, which is loaded by return from supervisor-mode into important user-registers like EFlags$_\pi$/Status-Register$_\mu$, IP$_\pi$/PC$_\mu$, etc., so, that CCR will be cleared or set on initial conditions, IRQ mask will be set to NMI, the trace-bit will be set and the supervisor-bit[mask] will be cleared and the DWord behind is the location of the test-opcode.

Now execute the return from supervisor-mode by the corresponding opcode-command (p.e. RTE$_\mu$): EFlags$_\pi$/Status-Register$_\mu$ is now loaded by above described values and the test-opcode executes, because IP$_\pi$/PC$_\mu$ is loaded by its address.

- If now a fatal exception occurs (except trace, p.e. privilege violation, etc.), the kind of exception is briefly shown graphically if desired, and it will be continued by generating and executing the next opcode.
- If an initial condition dependant exception occurs (like address error, division by zero, ...), a relation between initial condition an exception is analysed [attention: on several exceptions, because of trace, an in many literature not documented combination of both exceptions (internal processor handling) can occur (p.e. using M68000 on Trap, Chk, Div/0 in combination with Trace).]
- If no exception occurs (not even trace) the opcode-execution cleared the trace-bit (should never occur while executing single opcodes) and the handler behind the opcode is executed.
- On Trace-Exception (normal case) a usable opcode was generated which execution-effects have to be analysed now.

1.3.4.2 Analysis of opcode-repercussion and saving the analysis-result:

a.) After execution the EFlags$_\pi$/Status-Register$_\mu$ and the data- and address-registers and the reference-values of the address-registers an the reference-values one DWord below an the user-stackpointer are saved for analysis.

b.) Verifying the own machine-code-checksum (of AC-Prg.) and the inactive copy in RAM (both without test-opcode placement): If checksum changed, the AC-program injured itself while executing the test-opcode (overwrote own parts of program). The corresponding corrupt-flag is set in the table. If the active version checksum changed jump into the inactive version, then compare both versions byte by byte and repair the corrupt version by replacing the bytes in the version with the changed checksum by the bytes from the version with the correct checksum.

c.) Check the supervisor-bitmask of the saved user-stackpointer on the supervisor-stack: If the

processor was in supervisor-mode before jumping into the exception-handler, although he was in user-mode during test-opcode execution, a combination of the normal trace-exception with a low-priority-exception occurred [p.e. on Motorola Div/0-, Trap- or Chk-Exception (not documented in the M68000er handbook)]. That means the processor first fetched the exception-vector of the just occurred low-priority-exception and loaded the statusregister and the program-counter onto the supervisor-stack and then he jumped, while being in this processor intern routine, before starting the corresponding handler of the exception-vector, into the trace-exception-routine, which caused a further loading of the program-counter and the status-register (where now the supervisor-bit(mask) is set) onto the supervisor-stack.

By analysing the supervisor-bit(mask) on the supervisor-stack, it's now detectable, that before trace another low-priority-exception occurred; and by comparison of the second saved program-counter below on the supervisor-stack with the low-priority exception-vectors, now the primary exception before trace is detectable, which corresponding exception-number is stored.

d.) Comparison of the IP_{π}/PC_{μ} on the supervisor-stack with the address (placement) of the test-opcode-address: If the IP_{ψ}/PC_{μ} decreased, stayed unchanged, or increased by a value, which is larger than the longest possible opcode, the test-opcode was a jump-command.

If the IP_{ψ}/PC_{μ} increased by 5 or more bytes and less than the longest possible opcode, it was a long opcode or a short forward jump. If no registers changed from initial conditions it was a short jump.

This analysis-result is stored too.

e.) Comparison of the $EFlags_{\pi}$/Status-$Register_{\mu}$ and of all register-values and of the address-register destination-values and of the destination-values one max. address-length below [because of -(Adr.Reg.)], with the original-values.

In a bitmask now it's flagged which registers or its destination-values changed and it's analysed, which operations on which source- and destination-registers could have happened (heeding changes of $EFlags_{\pi}/SR_{\mu}$) and the result is stored in the ORT and OLT (see figs.5,19; 6,20) and the OBT is actualised (fig.7,21).

f.) If it was a jump-command, in the $EFlags_{\pi}/SR_{\mu}$ it's analysed if it was an conditional jump.

1.3.5 Realisation of the basic needs:

1.3.5.1 Realisation of artificial pain:

Pain is caused by system-injuring. The basic pain in the biological evolution incidences already on monocellars and is the injuring of the DNA in the cell nucleus. If the DNA is damaged, the monocellar has to take time to repair its DNA using its resources. It does it by filling missing aminoacids in the defect half of the double helix by adding the complement aminoacids to the undamaged half.

The AC program is loaded twice into RAM. If the AC program (or another one) executes a

command which overwrites a part of the active or inactive AC program, which means an injuring of the active or inactive code (DNA), it has the ability to recognise the damage by comparing the checksum, and has now to take time to repair the damaged code by comparing damaged and undamaged code to have information about the damage-location (valuable information for test-opcode analysis) and then copying the code from the undamaged version into the injured version to heal itself. If the active code was the injured one (had the corrupt checksum), it first has to jump into the inactive duplicate to prevent errors on self-healing, because the healing-routine itself could be damaged.

1.3.5.2 Realisation of artificial hunger:

Hunger means imminent loss of energy. Energy is engendered in the cells by transforming adenosintriphosphat to adenosindiphosphat. The energy for building up adenosintriphosphat from adenosindiphosphat is gained by combustion of glucose. Missing energy (ATP) makes metabolism and with it every action, reaction on pain, or self healing on injury, impossible.

The "energy quantity" of the AC-program is modelable by the height of a value in a data register. Now it would be possible to realise hunger by decreasing the electric current to the processor by external reading of this data register and increasing an ohm-resistance inverse proportional to the register value.

A less authentical hardware-unbound solution is possible too:

Less energy is harmful for learn-process. Frugal values in the energyspecific data-register cause lower functionality on learning from opcode-executions. On less values no learning from opcode-execution is possible. And lowest values cause loss of the saved knowledge from earlier opcode-executions. If the value is zero, additional pain, which means own code injury, occurs.

On hunger the AC-program consequently has to find and execute opcodes, which increase the value of the energyspecific data-register.

Decreasing energy, which means the origin of hunger, is simulated by decreasing the energyspecific data-register by 1 after every action (=opcode-execution) [p.e. by the AC-program itself].

1.3.6 Planning on the criterions of the valuation-system:

If the system tested all possible opcodes and analysed the effects of the suitable commands, it has now the possibility to learn planning aimed to comply its basic needs or its programming-aims:

Therefore it combines the opcodes, executes them using all initial conditions and analyses, what effected the code-combination on every single initial condition.

Because mostly longer opcode-combinations are necessary to fulfill the programming-aim, it plans the code combination by using only codes which caused no injury (own damage) or better no RAM access at all and caused no fatal exceptions (divide-error or overflow-exception are allowed) and

used no forbidden registers or opcodes (ADT.*unused_Registers_BitCode*| ADT.*unused_Operations-_BitCode*). OpCodes which use the desired destination and source-registers are preferred (ADT.*all_source/dest_Registers_BitCode*).

ADT.*aim_fulfill_valuation_mode* appoints, if the valuation-function is existent in SQL or directly in machine-code. For the beginning user the slower SQL-version is more convenient and the specialist would prefer to use an assembler–*aim_fulfilled_Flag_Function* (ADT) which is transformed into machine-code, because it's much faster on complex valuation-functions than SQL.

1.3.7 The dynamic-reflexive valuation-system:

1.3.7.1 Valuation of the programming-aim closeness:

The ADT.*aim_fullfilled_Flag_Function*(Aim_ID), returns TRUE, if the programming-aim is obtained and the VFT.*Valuation_Function*(Type='A', ADT.*aim_fullfilled_Flag_Function*, VFT.*Function_ID-_Chain*), supplies a signed-byte value, which means the closeness of the actual CLT(n)-opcode-combination on the used initial conditions to the aim-solution. The result is stored into CLT(n).*aim_valuation* and builds up in comparison with the last CLT(n-1).*aim_valuation* the gradient CLT(n).*gradient_aim_valuation.*

Because of the solution program has to work for all initial conditions, the maximum- and the average valuability of the opcode-combination, both as average over all initial conditions, is stored in CBT(n).*max_aim_valuation* and CBT(n).*avg_aim_valuation* ; and the gradients to the corresponding values of the last CBT(n-1) build up CBT(n).*max_grad_aim_valuation* and CBT(n).*avg_grad_aim_valuation*.

If the boundary-value of -128 or +127 was the valuation-result, the VFT.*boundary_value_counter* is incremented, and analog *low_value_counter* is incremented, if a valuation-result between -16 and +15 occurred.

Using these statistical data, and on an analysis of all CLT(i).*aim_valuation* -values, p.e. if you count the number of values in a small value-range running from min-possible-result to max-possible-result (-127 to +128) in dependence of the width of the value-range-window, the SAC.*Aim_Self_Valuation_Func* appraises after every programming-aim attainment the valuation-results of the VFT.*Valuation_Function* and with it its efficiency.

If the most valuation-results of the VFT.*Valuation_Function* p.e. were near the boundary-values (min./max.), the valuation-function was too steep and has to be flattened, which means inside the VFT.*Function_ID_Chain* have to be more elements with negative FIT.*Function_Flatten*. The opposite is valid, if the most valuation-results caused a high VFT.*low_value_counter*.

So after every solution of a programming-aim a self-valuation of the valuation-function occurs and a further step in the self-programming of the valuation-function. New elements are added to the valuation-function and sometimes elements are omitted and the steepness is adapted.

Then the valuation is done again and it's revised if the new valuation-function would have supplied

a better range of valuation-results.

If the new range of valuation-results was worse than the one before (valued by SAC.*Aim_Self_Valuation_Function*) then the modification of the valuation-function is quashed and another modification is tried. If the changing of the valuation-function ameliorated the range of valuation-results and the self-valuation-function returns a positive value, then it's continued with the next programming-task - otherwise a further amelioration of the valuation-function has to be done until self-valuation returns a positive value.

1.3.7.2 The dynamic energy-valuation-function:

The dynamic energyspecific valuation-system runs as follows:

0.) Because of the results of the energyspecific valuation-system are constricted to the range of *signed_byte* the valuation-function is embedded into a frame:
valuation-result := MIN[MAX(*valuation-function*, -128), +127)]

1.) The energy-valuation-function of 0-th order is "how saturated am I after the action ?":
valuation-function(0) := MIN[MAX(*Energy_after*, -128), +127)]

2.) The valuation-function of 1st order is "how much more saturated am I after the action than before ?":
valuation-function(1) := MIN[MAX(*Energy_after* – *Energy_before*, -128), +127]

3.) Because of the energy-register is of the type *unsigned integer* (DWord), the boundaries of the valuation would too often the result. Therefore a kind of logarithm or ...
valuation-function(2) := MIN[MAX[SQRT(*Energy_after* – *Energy_before*), -128], +127]

4.) Now negative energy-gradients would cause wrong signs, therefore 3rd square or ...
valuation-function(3) := MIN[MAX[SGN(*EnergyGrad*)*SQRT(*EnergyGrad*), -128], +127],
where *EnergyGrad* = *Energy_after* – *Energy_before*

Possibly the function ½·SGN(*EnergyGrad*)·SQRT(SQRT(*EnergyGrad*)) would be better, because it reaches exactly to the boundary-values, but maybe the boundary-values are reached very seldom and a subtler structuring around zero would be more important.

This depends how often the boundaries are reached and how much energy-gradients supply small values. Maybe the naked result-value (*Energy_after*) has to be weighted stronger and a valuation of the gradient alone is not sufficient. Moreover it had to be considered how much and which further registers are concerned beneath the energy-register and which and how much types of operations were executed, etc., and finally the execution-time of the energy-valuation-function itself. Therefore the energyspecific valuation-system has to be rarefied and adapted (like the valuation-system of intelligent biological life forms).

Using dynamic embedded [PL/]SQL the changing and reparsing of the as string stored valuation-function no problem. Because of the execution-speed and the possibility of implementation of earlier programming-aim solutions the energy-valuation-function should be used in machine-code prospectively.

The task of the amelioration of the energyspecific valuation-function is done, like the programming-

aim specific one, after every fulfilling of a programming-aim.

Valuation-system and valuation-results are always reflexively.

1.3.8 Reaching Self-Consciousness, Reproduction and Evolution:

Through the process of self-healing on pain/damage the program knows its location in memory. It now has the possibility to check out the effects of its own opcodes one after another, then consecutive opcode-combinations etc., and when it finally knows the effect of its total length, it'll reach self-consciousness and then has the possibility to reproduce itself and to ameliorate itself awarely while reproduction using its acquired knowledge (p.e. by removing the incommodious decrementing of the energy-register).
The intelligent conscious-varying reproduction is much more preeminenced than the biologic-genetic one, because the latter only refers to existing genes/DNA, while the AC-program can vary itself by changing and extending its code intentionally using its "experience of life".

1.4. Conceptual Formulation of the Programming-Aim and Examples of Achievement

To the AC-program an arbitrary programming-aim is challenged by giving one or more criterions in ADT.*aim_fulfilled_Flag_Function*, by which it can check out, if it solved the task.
Its job is it now to develop a program, which solves the problem for all initial-conditions.

1.4.1 Example_1: Developing a Program to compute the average:

A very simple but easy to comprehend job for the AC-program could be: "write a program that computes the average over two integer-variables".
The AC-program fulfills this task, if the difference between the result and the lower number is equal to the difference of the higher number and the result, and this is functioning for any arbitrary input-numbers.
But the AC program doesn't know the instruction-set of the processor - it knows now only the opcodes which caused no damage and no fatal exception and it knows the opcode-effects in reference to the different initial-conditions.
Through corruption-selfhealing or the energy-register it already knows easiest abandonments like "execute an action which causes no pain" or "execute an action which makes me saturated".
For attaining economic programming-aims, it now needs valuation-variables, which reveals answers to the following questions:

a.) How much nearer or farther away from the programming-aim took me the last added opcode-combination (that every added single opcode of it may cause opposite effects is irrelevant).

b.) How many processor clock-cycles needed the solution-program.

c.) How many bytes long is my program and how many opcodes are included ?

These answering variables (CBT-table-columns) are:

aim_valuation ; cycles_of_execution ; OpCode_length_or_jump.

The input-variables in the example-task could be in the first two data-registers (EAX_π, EBX_π respectively $D0_\mu$,$D1_\mu$ respectively $GPR0_\psi$, $GPR1_\psi$), here *R0* and *R1*.

The return-value should be the third data-register (ECX_π|$D2_\mu$|$GPR2_\psi$), here *R2*.

If the task is solved for arbitrary input-values, the program is ready, because it's function.

If there are more than one solution, the one is chosen which needs less clock-cycles.

The task-specific aim-fulfilled valuation-function, which computes OLT.*aim_valuation* is consequently in this example:

ADT.*aim_fulfilled_Flag_Function*(average of R0 and R1) = { (R2-R0)=(R1-R2) }

Here the problem could occur, that one input-value is even and the other one is odd, which means that this input-combination would have no solution. To implement that, the *aim_fulfilled_Flag-_Function* should be enhanced for integer-variables: { (R2-R0)=(R1-R2) || (R2-R0)+1 =(R1-R2) }.

The AC-program will find several solution-programs and takes the one with the least needed clock-cycles.

A possible solution would be in CBT(3): MOV R0,R2 ; ADD R1,R2 ; SHR R2

(... naturally in machine-code of the used processor - using a Pentium that would be the 48-bit-number #$89C2.01CA.D1EA, using a Motorola that would be #$2400.D282.E2C2 and using a PowerPC (RISC) a 96-bit-number would be the solution).

1.4.2 Example_2: generation of a programs for computation of the cube-root:

A further easy development-task would be "write a program that returns the cube-root of a FFP (fast floating point) number"; the input-variable should be R0 (EAX_π) and the output-variable R3 (EBX_π).

The AC-program fulfills this task, if the result multiplied with its square is equal to the input-value (and this is valid for all initial conditions):

⇒ *aim_fulfilled_Flag_Function(cube root)* = { (R3*R3*R3)=R0 } (←naturally in FFP-multiplic.)

A single command like the square-root (FSQRT) doesn't exist for the cube root.

The solution-program could be in CBT(8) using a Pentium II as follows:

Op1(16b):	MOV CL,3	;ECX=$????:0003	[1011.0001:0000.0011]
Op2(16b):	FLD1	;ST(0)=1.0	[1101.1001:1110.1000]

Op3(16b):	FIDIV CX	;ST(0) = $^1/_3$	[1101.1110:1111.0001]
Op4(16b):	FLD EAX	;ST(0) = R0 ;ST(1) = $^1/_3$	[1101.1001:1100.0000]
Op5(16b):	FYL2X	;ST(0) = $^1/_3$ $\log_2$(R0)	[1101.1001:1111.0001]
Op6(16b):	FLD1	;ST(0) = 1.0 ;ST(1) = $^1/_3$ $\log_2$(R0)	[1101.1001:1110.1000]
Op7(16b):	FSCALE	;ST(0) = 1.0*2^[$^1/_3$ $\log_2$(R0)]	[1101.1001:1111.1101]
Op8(16b):	FST EBX	;EBX = 2^[$^1/_3$ $\log_2$(R0)]	[1101.1001:1101.1011]

(... naturally only the second of these columns as a 128-bit-number with the bits set as shown in the last column.)

Hexadecimal that would be: B103.D9E8.DEF1.D9C0:D9F1.D9E8.D9FD.D9DB.

This would be a possible solution-number (=program) for the given task (there're surely shorter and faster solutions too).

1.5. Needed Hard-disk-Space and Oblivion

In both examples 16-bit-opcodes would be sufficient, but it's obvious, that large programming-aims would need much hard-disk space. Therefore the AC-program has to forget unimportant or error-causing opcode-combinations.

1.5.1 Table sizes:

IST, RIT and CIT need neglectable disk-space.

Theoretically there could be *size*(OBT) = 2^{32} * $\sum$ bytes(column(i)) = 485 GB, but also on a RISC processor never all 32-bit-combinations are used as a valid opcode and realistic are as an average on RISC processors about 28 bits ⇒ 30 GB and on CISC processors about 20 bits ⇒ 118 MB [on latter the most are 16 bit-opcodes, there're a few 8-Bit- and several 24- and 32-bit-opcodes, and the ones which are longer 32-bits are not used (we don't need memory-to-memory-operations for example and the functionality of one long opcode can be substituted by two or more shorter opcodes).

The 62 initial conditions can cause *size*(OLT) = $2^{[20..28]}$ * 62 * $\sum$ bytes(column(i)) = 3 GB (CISC) up to 832 GB (RISC) and *size*(ORT) could reach the same quantity, considering that one opcode mostly pertains one destination- and one source-register (unitary ones use only the destination-register and a few seldom opcodes use 3 or more registers). But there could be many effect-belonging *Operation_BitCodes*, which would increase the tablespace dramatically, if it wouldn't be compensated by the many opcodes which cause an exception, where less information has to be stored.

A much larger problem is the exponential growth of the CxT(i), because every i multiplies the needed tablespace by factor of $2^{[20..28]}$. But this is exact that what should be compensated by the dynamic valuation-system. It decreases its knowledge-absorption tolerance referable to the

remaining hard-disk space: So opcode-combinations with least CBT(i).*max_aim_valuation* or .*avg_aim_valuation* are forgotten and so will not be combined with other opcodes.
Although if the demand of hard-disk space arrears large, this is no problem in near future. Also the according to the combination-possibilities and table-sizes increasing calculation-times are compensated by larger and faster becoming hard-disks and the increasing efficiency of the processors.

1.5.2 Oblivion:

Like all intelligent life-forms, the system has to forget unimportant and less important informations, because
a.) the disk space is limited, and
b.) data access time becomes slow on very large data-tables.
Therefore after every satisfactorily achievement of objectives, when a new programming-aim is given, the ELT and all CxT(i)-tables over a remaining disk-space dependant i are deleted, and the opcode-combinations in the remaining CxT(i) are revalued referable to the new programming-aim and forgotten opcode-combinations are added, if they're valuable for the new aim and the higher CxT(i) are recreated dynamically.

1.6. Becoming Conscious

Through try_and_error the program learned what effectuated every action and what are the effects of which sequence of actions.
Through corruption-healing (if own code was overwritten in RAM) it had to repair its code and so it knows its position in memory.
If it once knows the effect of its own machine-code, it gets self-consciousness and has the ability to reproduce its code and to ameliorate it while reproduction.
Through the so initialised evolution the AC becomes complexer and better and will be able to solve larger and larger programming-tasks in future.

1.7. Presentment of the Economic Advantages

Here a totally new area of using a computer is presented. While normally in a computer run by man generated programs, which execute user-controlled applications, the AC-program itself develops and executes programming-aim oriented routines, which can later embedded into a large application.

The demand for software-development is worldwide much larger than the human potential of developers.
A system which learns to write programs itself has the capability to solve smaller development-tasks, and will in future, after several evolution-steps, have the capability to develop complex programs as the solution of large tasks too, if it has got enough hard-disk space.

The programmers will not have to develop all the routines they need - they order the routine from the AC-program and embed it into their application. So the companies can finish and sell their software-products earlier.

Doc-To-Help 3.0

CLAIMS:

What is claimed is:

1. A method using a computer which automatically generates and executes machine-code, comprising the steps of

 a) preventing the multi-tasking of the operation-system, by setting the interrupt-mask of the processor to NMI or using a multitasking-disable-routine of the operating-system;

 b) capturing the processors exception-vectors by own analysis-routines;

 c) generating normal numbers and writing them into memory;

 d) backing up the current values of the processors registers;

 e) positioning the instruction-pointer = program-counter to the generated number in memory and executing the number like it would be a processor-opcode; and

 f) analysing the effects of this opcode-like execution of the number and storing the analysis-results, p.e. in a database.

2. A method according to claim 1, wherein said step of (d) "backing up the current values of the processors registers" comprising the steps of:

 a) not only saving them for a later comparison but setting them to predefined initial conditions;

 b) setting them not only one time but several times to many different predefined initial conditions which means several executions of one number in step (e) by these different initial conditions for to have a more efficient analysis-determinations of possible number-execution-effects in step (f).

3. A method according to claim 2, wherein said step (1f) "analysing the effects of this opcode-like execution of the number" further comprising the step of determining the number=opcode's mnemonic and its related source- and destination-registers by regarding all execution-effects of every initial condition.

4. A method according to claim 3, wherein said step (1c) "generating normal numbers and writing them into memory" comprising the steps of combinations, which means:

a) taking one number which analysed results are already stored and appending another number with stored analysis-results to analyze the execution-effects of this two-number-combination and store the result.

b) combining 2-number-combinations, which effects are already analysed, with a further analysed number and analysing and storing the analysis-results of the effects of these 3-number-combinations.

c) combining a 3-number-combination, which effects are already analysed, with a further number, which effects are already analysed, or combining two 2-number-combinations, which effects are already analysed, and analysing and storing the effects of these 4-number-combinations.

d) combining larger combinations, which effects are already analysed, with numbers or combinations, which effects are already analysed, and analysing and storing the effects of these larger combinations.

5. A method according to claim 4, further comprising the step of using only combinations for further use, which got a positive value from a valuation-function, which appraises the valuability of the combination in reference to reaching a pregiven programming-aim, not causing fatal exceptions, not overwriting exception-vectors or the program, avoiding to use forbidden registers or extensive writes to memory or large jumps, etc.

6. A method according to claim 5, further comprising the step of valuating and changing the valuation-function of the dynamic valuation-system by a meta-valuation-function valuating the results of the valuation-function according to clustering to boundary-values, low-values, other fixed values, etc., and then revaluating the results of the new valuation-function.

7. A method according to claim 4, further comprising the step of implementing calls to operation-system routines which are offered in a table with entrance-address and source- and destination-registers.

8. A method according to claim 7, further comprising the step of using only calls and combinations for further use, which got a positive value from a valuation-function, which appraises the valuability of the call-combination in reference to reaching a pregiven programming-aim, not causing fatal exceptions, not overwriting exception-vectors or the program, avoiding to use forbidden registers or extensive writes to memory or large jumps, etc.

9. A method according to claim 8, further comprising the step of offering the disassembly of the solution-programs which solved the programming-aim.

10. A method using a computer which automatically generates and executes machine-code,

comprising the steps of

a) capturing the tasks=processes exception-vectors by own analysis-routines;

b) generating normal numbers and writing them into memory;

c) backing up the current values of the processors registers;

d) positioning the instruction-pointer=program-counter to the generated number in memory and executing the number like it would be a processor-opcode; and

e) analysing the effects of this opcode-like execution of the number and storing the analysis-results, p.e. in a database.

11. A method according to claim 10, further comprising the steps of modelling the following basic needs:

a) "no_pain", where pain means damage to the own program, which is an overwriting of the own machine-code, which is recognised by comparing the programs checksum after every execution of a number or number-combination, and repairing damaged parts of the own machine-code from a duplication, which causes a decrementation of the energy-register for every damaged opcode of the own program which now has to be copied for reparation; and

b) "no_hunger", where hunger means the imminent loss of energy, where energy is modelled by the value of a predefined register, which causes negative effects on low values like
- the loss of the capability of appraising combinations referable to the programming aim on low values of the energy-register,
- mistakes on the valuation of the combination-execution concerning the source-registers on very low values of the energy-register,
- the loss of the capability of self-repairing on "pain" on extreme low values of the energy-register,
- a hardware-dependant decreasing of the power supply of the RAM (p.e. by increasing a resistor) on two times in series extreme low values of the energy-register,
- a hardware-dependant decreasing of the power supply of the processor (p.e. by increasing a resistor) on three times in series extreme low values of the energy-register,

and this energy-register is decremented after every action, where action means the execution of a number.

12. A method according to claim 10, wherein said step of (10c) "backing up the current values of

the processors registers" further comprising the steps of

a) not only saving them for a later comparison but setting them to predefined initial conditions;

b) setting them not only one time but several times to many different predefined initial conditions which means several executions of one number in step (10d) by these different initial conditions for to have a more efficient analysis-determinations of possible number-execution-effects in step (10e).

13. A method according to claim 12, wherein said step (10e) "analysing the effects of this opcode-like execution of the number" further comprising the step of determining the number=opcode's mnemonic and its related source- and destination-registers by regarding all execution-effects of every initial condition.

14. A method according to claim 13, further comprising the step of valuating the effects of the execution of the number in reference to its basic needs, which means positive values for numbers, which cause no pain or increase the energy-register and negative values for numbers which cause above defined "pain" or "hunger".

15. A method according to claim 14, further comprising the step of combining numbers and executing these combinations and valuating the effects of the executions of these combinations.

16. A method according to claim 15, comprising the step of running several of these said programs as an extra process=task.

17 A method according to claim 15, comprising the step of using a network topology where on two or more of the networked computers is running one of these programs.

18. A method according to claim 14, further comprising the step of analysing a pregiven code by executing larger getting sequences of it instead of executing number-combinations, for to evaluate the effects these code-sequences or at least of the complete program.

19. A method according to claim 18, further comprising the step of improving the analysed code in the direction of a pregiven programming-aim.

20. A method according to claim 15, further comprising the step of implementing calls to operation-system routines which are offered in a table with entrance-address and source- and destination-registers.

21. A method according to claim 20, further comprising the step of using only calls and combinations for further use, which got a positive value from a valuation-function, which appraises the valuability of the call-combination in reference to reaching a pregiven programming-aim, not causing fatal exceptions, not overwriting exception-vectors or the program, avoiding to use forbidden registers or extensive writes to memory or large jumps, etc.

Copyright (C) 2004 Bundesdruckerei GmbH

ABSTRACT OF THE DISCLOSURE:

A method for generating a simple kind of computer based artificial consciousness, which means to give a in a computer running invention-pursuant program the capability to act and to know the effects of its actions and to plan further actions consciously. This is realized by giving the computer the capability to program its processor by its own and to plan that self-programming targeted. This works, because the computer learns to program in machine-code by its own and it has got a dynamical valuation system to weight if its actions are useful or not. Further basic needs like "no_pain" and "no_hunger" are modelled to make it act to fulfill its basic needs. It has also the capability to solve a pregiven by several formulas determined programming aim, which means to develop logical programs which then can be implemented by users into their projects.

Document ID: US 2003/0149675 A1

Gerd Kiermeier

DRAWINGS:

3.1 Relational Database of the AC-knowledge:

3.1.1 ER-Diagram of the AC-Database:

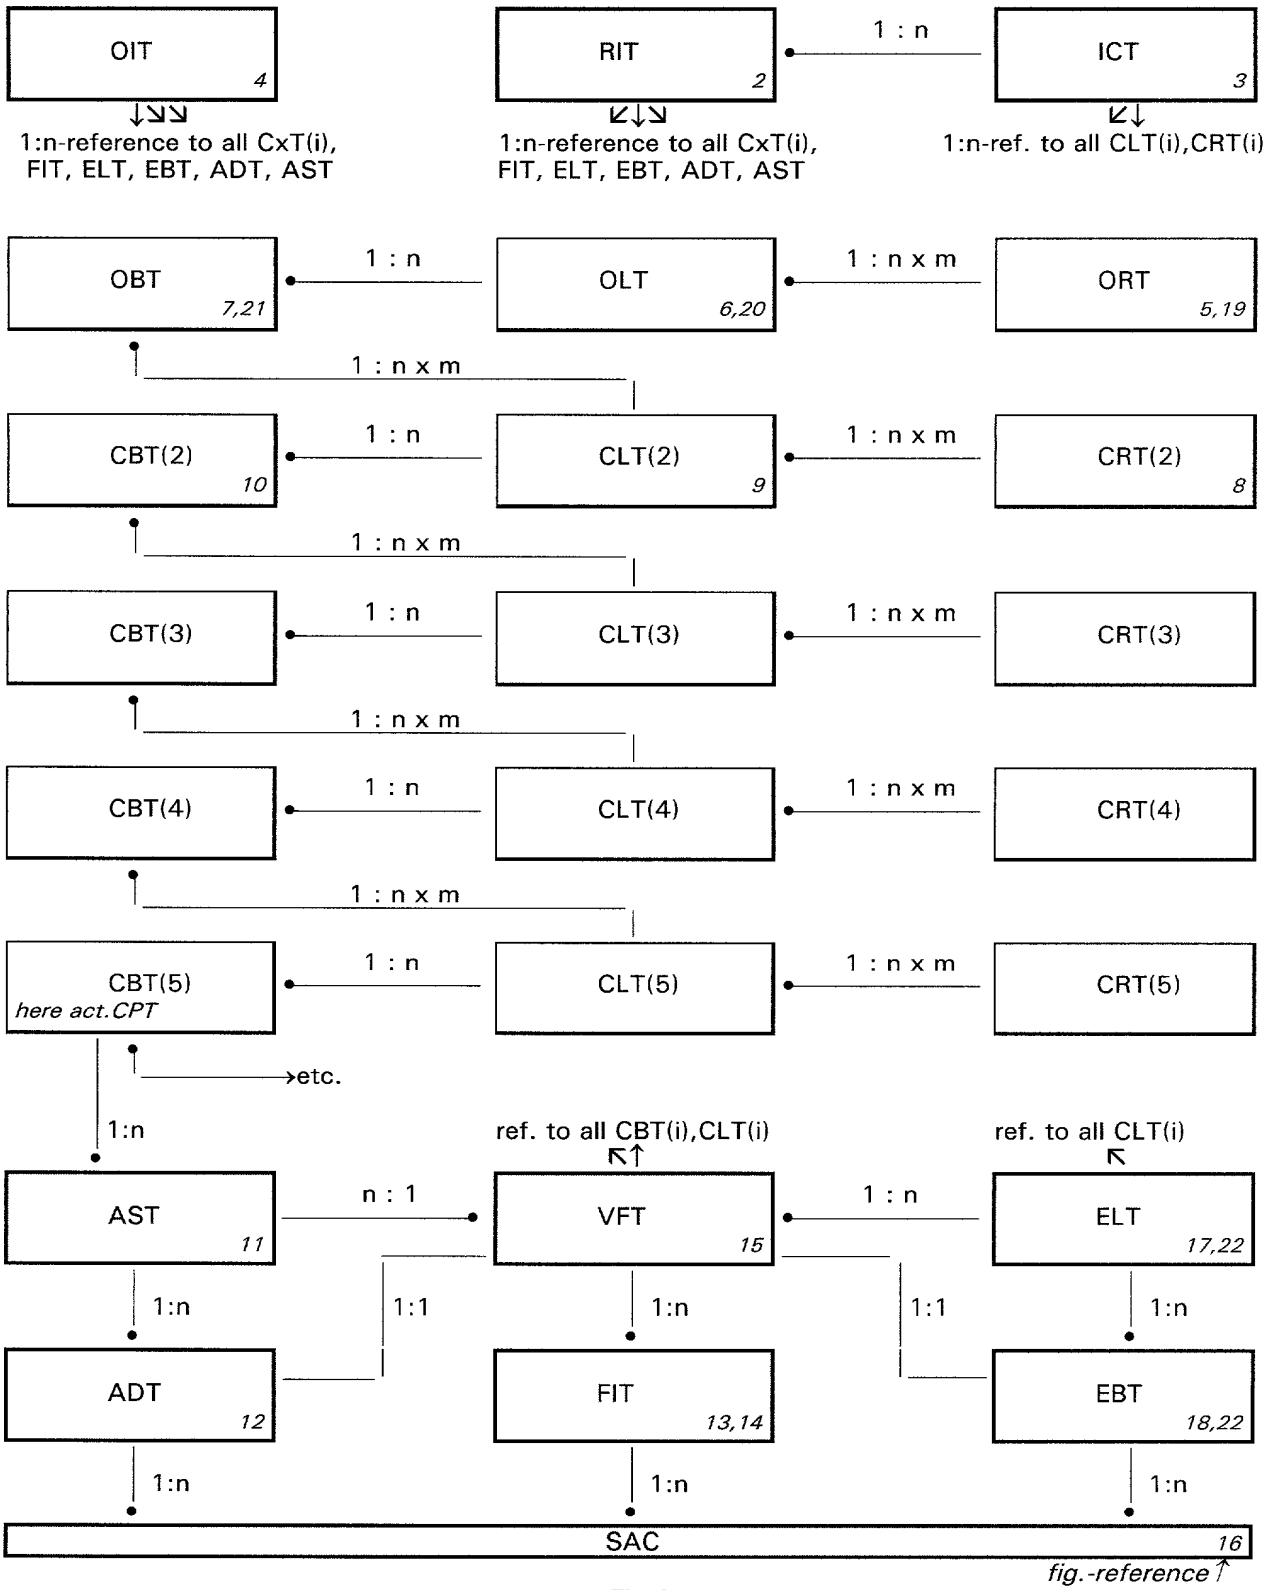


Fig. 1

3.1.2 Tables of the AC-Database:

Register-Identification-Table: *[RIT: every processor-register gets a Reg.ID and a Reg.BitCode]*

column:	*datatype*	*value-range*	*meaning:*
Register_ID *(PK)*	signed byte	-128..127	0 = Flags-reg., 1-... = data-reg., adr.reg., adr.reg.-destinations, FFP-reg., control-reg., debug-reg., etc.; neg.reg.ID = exception-vector-nr. (no processor-reg.)
Register_BitCode	number	$0..2^{128}-1$	2^Register_ID, 0 if Register_ID is negative.
Register_type	char(1)	1 Byte	*type of register:* # = flags-reg., D = data-reg., A = address-reg., V = adr.-reg.-destination, E = exception-vector, etc. (processor dependant).
Register_number	byte	0..127	current number of the *{register-type}*-registers.
Register_Description	varchar2(32)	≤32 Bytes	optional description of the register[-reference].

Fig.2a

Register_ID	***Register_BitCode***	***Register_type***	***Register_number***	***Register_Description***
...	0	E	...	*{for all Exception-Vectors}*
-8	0	E	8	Privilege-Violation Exception
...	0	E	...	*{for all Exception-Vectors}*
0	1	#	0	Status-Register ($\triangleq$ $EFlags_{\pi}$)
1	2	D	0	Data-Register D0
...	4	D	...	*{for all Data-Registers D1-D6}*
8	8	D	7	Data-Register D7
9	16	A	0	Address-Register A0
...	...	A	...	*{for all Address-Registers A1-A6}*
16	65536	A	7	Address-Register A7 (=USP!)
17	131072	V	0	Destination of Address-Register A0
...	...	V	...	*{for all Adr.-Reg.-Destinations A1-A6}*
24	16777216	V	7	Destination of Adr.-Reg. A7 [=(USP)]
25	33554432	v	0	Destination before Adr.Reg A0 [-(A0)]
	...	v	...	*{for all Adr.Reg.-Dest. before A1-A6}*
32	$1.0000.0000	v	7	Destination before Adr.Reg A7 [-(USP)]
33	$2.0000.0000	F	0	Floating-Point Data-Register FPR0
...	...	...	...	*{for all further Registers}*

Fig.2b *(RIT in a Motorola-Example)*

Initial-Conditions-Table: *[ICT: every register(-reference) gets 62 initial conditions]*

column:	*datatype*	*value-range*	*meaning:*
IniConNr *(PK)*	signed byte	-31..+30	number of the initial-condition combination
Register_ID *(PK)*	signed byte	0..127	see RIT
Register_Value	integer	$0..2^{32}-1$	value of the register(-reference) on actual IniConNr

Fig.3a

Therefore 62*#registers test-values are generated, p.e. using the following function:
Register_Value(IniConNr, Register_ID) = SGN(IniConNr) * INT(2^ABS(IniConNr/2) + ½) + prime_number(3*Register_ID) or similar.
,where prime_number(0) = 0 and prime_number(−n) = −prime_number(n)
[no 2 equal register(-destination)-values]

Fig.3b

Operation-Identification-Table: *[OIT: every processor-operation gets an Oper.ID and an Oper.BitCode]*

column:	*datatype*	*value-range*	*meaning:*
Operation_ID *(PK)*	signed byte	-1..63	bit of the Calculation_BitCode - see table below.
Operation_BitCode *(FK)*	number	$0..2^{128}-1$	2^Calculation_ID - see table below.
Operation_Type	char(5)	5 Bytes	5 characters-code of the operation-type, see *Fig.4c*
Operation_Mnemonic	char(5)	5 Bytes	abbreviation of the operation - see table below.
Operation_Description	varchar2(32)	≤32 Bytes	optional description of the operation - see table below

Fig.4a

Operation_ID	*Operation_BitCode*	*Operation_Type*	*Op.Mnemonic*	*Operation_Description*
-1	0		???	unknown operation
0	1	.I11?	TST	set flags in dependence of reg.(-ref.)
1	2	.I12!	NEG	negation \| amount
2	4	.I12!	NOT	bitwise inversion
3	8	:I02_	MOVI	const.integer→register(-reference)
4	16	:I12+	ADDI	add constant integer
5	32	:I12-	SUBI	subtract constant integer
6	64	:I13*	MULI	multiply constant integer
7	128	:I23/	DIVI	divide by constant integer
8	256	:I13%	MODI	rest of integer-division
9	512	:I12*	SHLI	integer-times a duplication
10	1.024	:I12/	SHRI	integer-times a halvation
11	2.048	:I12\|	ORI	set bits set in a constant integer
12	4.096	:I12&	ANDI	clear bits not set in a const. integer
13	8.192	:I12?	BTSTI	check if int-th bit is set in reg.(-ref.)
14	16.384	:I12?	CMPI	reg.(-ref.)-comparison with integer
15	32.768	II22_	MOV	move src.-reg.(ref.)→dest.reg(ref.)
16	65.536	II22+	ADD	addition of register(-reference)
17	131.072	II22-	SUB	subtraction of register(-reference)
18	262.144	II23*	MUL	multiplication of register(-reference)
19	524.288	II33/	DIV	division by register(-reference)
20	1.048.576	II33%	MOD	rest of division by register(-ref.)
21	2.097.152	II22*	SHL	register(-ref.)-times a duplication
22	4.194.304	II22/	SHR	register(-ref.)-times a halvation
23	8.388.608	II22\|	OR	set bits set in of register(-reference)
24	16.777.216	II22&	AND	clear bits not set in register(-ref.)
25	33.554.432	II21?	BTST	check if reg.(-ref.)-th bit is set
26	67.108.864	II21?	CMP	compare reg.(-ref.)1 with reg.(-ref.)2
27	134.217.728	:P00.	JMP	add integer to PC_μ/EIP_π (=jump to)
28	268.435.456	CP1.<	JLT	jump if CMP<
29	536.870.912	CP1!>	JLE	jump if CMP≤
30	1.073.741.824	CP1.=	JEQ	jump if CMP=
31	2.147.483.648	CP1!<	JGE	jump if CMP≥
32	4.294.967.296	CP1!=	JNE	jump if CMP≠
33	$2.0000.0000	CP1.>	JGT	jump if CMP>
34	$4.0000.0000	CP1!<	JPL	jump if ≥0
35	$8.0000.0000	CP1.<	JMI	jump if <0
36	$10.0000.0000	CP1.^	JCS	jump if carry-flag is set
37	$20.0000.0000	CP1!^	JCC	jump if carry-flag is clear
38	$40.0000.0000	CP1.~	JVS	jump if overflow is set
39	$80.0000.0000	CP1!~	JVC	jump if overflow is clear
40	$100.0000.0000	CP2.<	DJMP	decrement and jump if reg.(-ref.)<0
41	$200.0000.0000	PS1..	CALL	$PC_\mu/EIP_\pi \rightarrow -(USP_\mu/ESP_\pi)$; +JUMP
42	$400.0000.0000	SP11.	RET	$(USP_\mu/ESP_\pi)+ \rightarrow PC_\mu/EIP_\pi$
43	$800.0000.0000	.I...	I???	unknown integer-operation
44	$1000.0000.0000	.F...	F???	unknown floating-point-operation

45	$2000.0000.0000	FF09_	FINIT	initialise floating-point-unit
46	$4000.0000.0000	FI12_	FIST	store float.point-reg.→integer-reg.
47	$8000.0000.0000	IF12_	FILD	load integer-reg.→floating-point-reg.
48	$1.0000*$2^{32}$	IF22+	FIADD	floating-point add constant integer
49	$2.0000*$2^{32}$	IF22-	FISUB	floating-point subtract const.integer
50	$4.0000*$2^{32}$	IF22*	FIMUL	floating-point multiply const.integer
51	$8.0000*$2^{32}$	IF22/	FIDIV	floating-point divide by const.integer
52	$10.0000*$2^{32}$	IF21?	FICMP	float.pt.compare with integer→flags
53	$20.0000*$2^{32}$	:F02_	FLD#	load constant to floating-point-reg.
54	$40.0000*$2^{32}$	.F12!	FABS	build floating-point amount
55	$80.0000*$2^{32}$	FF12_	FLD	copy floating-point-register
56	$100.0000*$2^{32}$	FF22+	FADD	add 2 floating-point-register
57	$200.0000*$2^{32}$	FF22-	FSUB	subtract 2 floating-point-register
58	$400.0000*$2^{32}$	FF22*	FMUL	multiply 2 floating-point-register
59	$800.0000*$2^{32}$	FF22/	FDIV	divide one float.pt.reg. by another
60	$1000.0000*$2^{32}$	.F12@	FSQRT	square-root of a floating-point-reg.
61	$2000.0000*$2^{32}$	.F12@	FSIN	floating-point-sine
62	$4000.0000*$2^{32}$	.F12@	FCOS	floating-point-cosine
63	$8000.0000*$2^{32}$	.F12@	FATAN	floating-point arc-tangent
64	$1*$2^{48}$	FF22*	FEXP2	$y:=y*2^x$ (anykind of exp.-func.)
65	$2*$2^{48}$	FF22/	FLOG2	$y:=x*\log_2 y$ (any kind of logarithm)
66	$4*$2^{48}$	FF21?	FCMP	compare 2 float.-point-reg.→Flags
67	$8*$2^{48}$	$I11_	SMOV	move from a special Register
68	$10*$2^{48}$	I$11_	MOVS	move to a special Register
...	...	...	...	...

Fig.4b

... using the following operation-type character-codes:

1st char. = source , 2nd char. = dest.:	?	= unknown, ambitious letter for all possible following
	.	= nothing
	:	= constant number
	I	= integer-register-[reference]-value
	F	= floating-point register
	C	= condition-code register (last byte in $EFlags_{\pi}/SR_{\mu}$)
	P	= instruction-pointer / program-counter (EIP_{π}/PC_{μ})
	S	= stack-pointer reference-value
	~	= comparison-operation →flags
	$	= a special-register like flags-, control-, debug-, ... -reg.
	!	= logical NOT for comparison in the 4th field
3rd char. = number of source-registers:		including destination reg., if it's used as source-reg. too
4th char. = number of dest.-registers:		including flags-register but without the instruction-pointer
5th char. = effect of arithmetic:	?	= unknown
	.	= none
	!	= amount \| negation \| bitwise_inversion
	+	= addition
	−	= subtraktion
	*	= multiplication
	/	= division
	%	= rest of division
	\|	= setting of bits (mostly bitwise OR)
	&	= clearing of bits (mostly bitwise AND)
	@	= trigonometric- or exponential-function
	>	= greater? (CC-flags dependant action)
	<	= less? (CC-flags dependant action)
	=	= equal? (CC-flags dependant action)
	^	= carry? (CC-flags dependant action)
	~	= overflow? (CC-flags dependant action)

Fig.4c

09.03.2004 14:50:36

OpCode-Register-Table: *[ORT - by opcode icl, initial-conditions concerned registers and the effect]*

column:	*datatype*	*value-range*	*meaning:*
OpCode *(PK)*	integer	$0..2^{32}-1$	complete instruction, truncated if > 4 bytes
IniConNr *(PK)*	signed byte	-31..30	current number of the used initial conditions
Register_ID_dest *(PK)*	signed byte	0..127	one by execution concerned destination-reg. (see RIT)
Register_ID_source *(PK)*	signed byte	-1,0..127	-1 or one possible source-register (see RIT).
value_before_change	integer	$0..2^{32}-1$	register(-reference)-value before it was changed
value_after_change	integer	$0..2^{32}-1$	register(-reference)-value after changing
gradient_if_unsigned	signed byte	-128..127	before/after-gradient, when defined as unsigned
gradient_if_signed	signed byte	-128..127	before/after-gradient, when defined as signed
value_source	integer	$0..2^{32}-1$	value of a possible source-register(-reference)
Operations_BitCode	number	$0..2^{128}-1$	bitmask, which flags all possible operations between this Register_ID_dest / Register_ID_source -combination (p.e. 2+2=2*2 using same reg.'s). Values see CIT, calculation see fig.19.

Fig.5

For every register- or register-reference-modification of the same opcode-execution one entry is generated, which gives information about the register(-reference)-values before and after the execution and further information about the degree of changing and with it a hint to a possible operation and a possible source-register which were used. (Packed-, nibble-, or BCD-operations are not considered.)
The last address-register is the stack-pointer. The last data-register is the "energy"-register.
An address-register can be every register which value can be a pointer to memory which destination can be accessed using this register as a reference.

Several registers can be modified simultaneous - therefore this additional 1:n table, where *Register_ID_dest* means the identity of the changed register. Sometimes many register(-references) could be the source for one operation - this quantum increases through the sum over all possible operations.
Therefore the following tables identify the used opcode and the concerned register(s):

OpCode-Learn-Table: *[OLT - ascertained effect of the opcode using the concerning initial conditions]*

column:	*datatype*	*value-range*	*meaning:*
OpCode *(PK)*	integer	$0..2^{32}-1$	complete instruction, truncated if > 4 bytes
IniConNr *(PK)*	signed byte	-31..30	number of used initial condition
active_ChkSum_corrupt	boolean	1\|0	flag: checksum of active AC-program changed
inactive_ChkSum_corrupt	boolean	1\|0	flag: checksum of inactive AC-program changed
Exception_Vect_changed	signed byte	-128...0	Register_ID of the (first) overwritten exception-vector
multiple_Exc_Vect_chg	boolean	1\|0	more than one exception-vector was overwritten
Processor_Mode_Changed	boolean	1\|0	flag: processor-mode changed (p.e. trace cleared)
Number_of_Exception	byte	0..N+1	exception-number [0:=no_exception] (if 0=exc.:+1)
OpCode_length_or_jump	signed byte	-128..127	EIP_π/PC_μ after execution – EIP_π/PC_μ before execution -128=$FF=long back-jump, 127=$7F=long forward j.
CCR_before_execution	byte	0..255	CC-flags, which could cause a jump.
Register_changed_BitCode	number	$0..2^{128}-1$	Ξ 2^ORT.Register_ID_dest ∀ ORT(opcode,IniConNr)
Register_source_BitCode	number	$0..2^{128}-1$	Ξ 2^ORT.Register_ID_source ∀ ORT(opcode,IniConNr)
max_Operations_BitCode	number(19)	$0..2^{128}-1$	Ξ ORT.Calculation_BitCode ∀ORT(opcode,IniConNr)
min_Operations_BitCode	number(19)	$0..2^{128}-1$	ζ ORT.Calculation_BitCode ∀ORT(opcode,IniConNr)
time_of_execution	integer	$0..2^{32}-1$	deci-seconds_after_{20.9.1994, 0:00:00,0 o'clock}
cycles_of_execution	byte	1..255	clock-cycles the opcode-execution needed
aim_valuation	signed byte	-128..127	aim-attaining-valuation using above initial-conditions
gradient_aim_valuation	signed byte	-128..127	-"-difference to *CLT(n-1, IniConNr).aim_valuation*

Fig.6

OpCode-Base-Table: *[OBT - ascertains the effect of the opcode-execution from the initial conditions]*

column:	*datatype*	*value-range*	*meaning:*
OpCode *(PK)*	integer	$0..2^{32}-1$	complete instruction, truncated if > 4 bytes
Execution_counter	byte	0..255	number of the OLT-entries until now
FatalError_counter	byte	0..255	number of the opcode-caused fatal errors until now: CheckSum_corrupt, Exception_Vect_changed, Trace_Bit_cheared, Processor_Mode_changed, and the exceptions without *Divide-Error, Overflow.*
low_Error_counter	byte	0..255	number of *divide*-errors plus *overflow*-exceptions
Jump_longOp_probability	signed byte	-128..127	probability that it's a long opcode or a jump
avg_OpCpde_jump_length	signed byte	-128..127	average length of opcode or jump
OpCode_len_unconfirmed	boolean	1\|0	min. one divergence from above average exists
avg_cycles_of_execution	byte	1..255	average by opcode-execution needed clock-cycles
exec_cycles_unconfirmed	boolean	1..0	min. one divergence from above average exists
Register_write_probability	signed byte	-128..127	probability: opcode writes into a register
Register_copy_probability	signed byte	-128..127	probability: opcode copies register
Memory_write_probability	signed byte	-128..127	probability: opcode writes into memory
Memory_copy_probability	signed byte	-128..127	probability: opcode copies memory
Reg_to_Mem_probability	signed byte	-128..127	probability: opcode copies reg. to adr.reg.-destination
Mem_to_Reg_probability	signed byte	-128..127	probability: opcode copies adr.reg.-destination to reg.
Multi_Reg_write_prob	signed byte	-128..127	probability: opcode writes into more than one register
Multi_Mem_write_prob	signed byte	-128..127	probability: opcode writes to many adr.reg.-destination
Multi_Reg_to_Mem_prob	signed byte	-128..127	prob.: opcode copies ≥2 reg. to ≥2 adr.reg.-destination
Multi_Mem_to_Reg_prob	signed byte	-128..127	prob.: opcode copies ≥2 adr.reg.-destinations to ≥2 reg
all_Reg_dest_BitCode	number	$0..2^{128}-1$	Ξ OLT.Register_changed_Bitcode ∀ OLT(OpCode)
cut_Reg_dest_BitCode	number	$0..2^{128}-1$	ζ OLT.Register_changed_Bitcode ∀ OLT(OpCode)
all_Reg_source_BitCode	number	$0..2^{128}-1$	Ξ OLT.Register_source_Bitcode ∀ OLT(OpCode)
cut_Reg_source_BitCode	number	$0..2^{128}-1$	ζ OLT.Register_source_Bitcode ∀ OLT(OpCode)
max_Operation_BitCode	number	$0..2^{128}-1$	Ξ OLT.max_Operation_BitCode ∀ OLT(OpCode)
min_Operation_BitCode	number	$0..2^{128}-1$	ζ OLT.min_Operation_BitCode ∀ OLT(OpCode)
all_Operation_BitCode	number	$0..2^{128}-1$	Ξ OLT.min_Operation_BitCode ∀ OLT(OpCode)
cut_Operation_BitCode	number	$0..2^{128}-1$	ζ OLT.max_Operation_BitCode ∀ OLT(OpCode)
max_write_value	integer	$0..2^{32}-1$	maximum of all destination-values
min_write_value	integer	$0..2^{32}-1$	minimum of all destination-values
avg_write_value	integer	$0..2^{32}-1$	average over all destination-values
max_write_gradient	integer	$0..2^{32}-1$	maximum gradient of the changed value
min_write_gradient	integer	$0..2^{32}-1$	minimum gradient of the changed value
avg_write_gradient	integer	$0..2^{32}-1$	average gradient of the changes value
evaluated_source_Register	signed byte	-1,0..127	ascertained source-register-ID (after OBT-evaluation)
evaluated_source_NumReg	signed byte	-128, -1, 0..127	-128 ≙ LOB means source-constant; 0..127 means a further source-register_ID; none=-1 (after OBT-eval.)
evaluated_dest_Register	signed byte	-1, 0..127	ascertained destination-register after OBT-evaluation
evaluated_dest_Register2	signed byte	-1, 0..127	possible 2nd dest.-reg. after OBT-evaluation or flags-reg. (2 real dest.-reg. ⇒ flags-reg. not appreciated).
evaluated_Operation_ID	signed byte	-1,0..63	ascertained operation-ID (after OBT-evaluation)
Confirmation_counter	byte	0..255	counter: same effects on other initial conditions
max_aim_valuation	signed byte	-128..127	max. valuability of the opcode for aim-attaining
avg_aim_valuation	signed byte	-128..127	average valuability of the opcode for aim-attaining
max_grad_aim_valuation	signed byte	-128..127	max. gradient of aim-attaining in relation to the by 1 shorter opcode-combination of the last CBT(i-1).
avg_grad_aim_valuation	signed byte	-128..127	average gradient concerning above -"-

Fig. 7

Datatypes: *Boolean* 1 Bit, BCD/Nibble 4 Bit, *Byte/char(1)* 8 Bit, *Word/short* 16 Bit, *DWord/Integer* 32 Bit, *QWord/number(19)* 64 Bit, *number/number(38,0)* 128 Bit (38 digits ≙ 16 bytes), *varchar2(N)* string of variable length with max.N characters, *long* very long string with max(longDef) characters.

The following **combination-tables** are created dynamically - they have the same non-PK-columns, like the OBT respectively OLT respectively ORT, but for every additional number of combinations a further more opcode in the PK:

Combination-Register-Table: *[CRT(i), i = number of opcodes in the combination, CRT(1) = ORT]*

column:		*datatype*	*value-range*	*meaning:*
OpCode_1	*(PK)*	integer	$0\text{-}2^{32}\text{-}1$	opcode #1 (first of the combination)
{for all OpCodes}	*(PK)*	*all* integer	$0\text{-}2^{32}\text{-}1$	{for all opcodes from #2 up to N-1}
OpCode_N	*(PK)*	integer	$0\text{-}2^{32}\text{-}1$	opcode#N (last of the combination)
IniConNr	*(PK)*	signed byte	-31..30	current number of the used initial conditions
Register_ID_dest	*(PK)*	signed byte	0..127	one by execution concerned destination-reg. (see RIT)
Register_ID_source	*(PK)*	signed byte	-1..127	-1 or one possible source-register (see RIT).
{same non-PK columns like in the Opcode-Register-Table.}		see above	see above	*same non-PK columns like ORT.*

Fig.8

Combinations-Learn-Table: *[CLT(i), i = number of opcodes in the combination, CLT(1) = OLT]*

column:		*datatype*	*value-range*	*meaning:*
OpCode_1	*(PK)*	integer	$0\text{-}2^{32}\text{-}1$	opcode #1 (first of the combination)
{for all OpCodes}	*(PK)*	*all* integer	$0\text{-}2^{32}\text{-}1$	{for all opcodes from #2 up to N-1}
OpCode_N	*(PK)*	integer	$0\text{-}2^{32}\text{-}1$	opcode#N (last of the combination)
IniConNr	*(PK)*	signed byte	-31..30	current number of the used initial conditions
{same non-PK columns like in the Opcode-Learn-Table.}		see above	see above	*same non-PK columns like OLT.*

Fig.9

Combinations-Base-Table: *[CBT(i), i = number of opcodes in the combination, CBT(1) = OBT]*

column:		*datatype*	*value-range*	*meaning:*
OpCode_1	*(PK)*	integer	$0\text{-}2^{32}\text{-}1$	opcode #1 (first of the combination)
{for all OpCodes}	*(PK)*	*all* integer	$0\text{-}2^{32}\text{-}1$	{for all opcodes from #2 up to N-1}
OpCode_N	*(PK)*	integer	$0\text{-}2^{32}\text{-}1$	opcode#N (last of the combination)
{same non-PK columns like in the Opcode-Base-Table.}		see above	see above	*same non-PK columns like OBT.*

Fig.10

CBT(max.) = CPT = Combination-Plan-Table = point of origin of the outcoming program.

Programming-aim and valuation-function tables:

Aim-Solution-Table: *[AST - solutions of all programming-aims]*

column:	*datatype*	*value-range*	*meaning:*
Aim_ID *(PK)*	short	0..65535	Identifier of the programming-aim
Solution_Nr *(PK)*	byte	0..255	number of the solution-program
aim_Program	long	String	opcode-combination of the solution here as a string
Program_length	short	1..65535	length of the solution-program in doublewords
cycles_of_execution	integer	$1..2^{32}-1$	execution-time in clock-cycles of the solution-program
used_Registers_BitCode	number	$1..2^{128}-1$	bitcode of all in the solution-program used registers
used_Operations_Bitcode	number	$1..2^{128}-1$	bitcode of all in the solution-program used opcodes
used_aim_Valuation_Func	signed short	0..32767	identifier of the used aim-distance valuation-function

Fig. 11

Aim-Description-Table: *[ADT - identification and description of programming-aim]*

column:	*datatype*	*value-range*	*meaning:*
Aim_ID *(PK)*	short	0..65535	Identifier of the programming-aim
aim_Description	varchar2(32)	≤32 Bytes	description of the programming-aim
used_Processor_Mode	integer	$0-2^{32}-1$	flags above CC \| control-register-bits
all_dest_Register_BitCode	number	$1..2^{128}-1$	bitcode of all output-registers in this task
all_source_Register_BitCode	number	$1..2^{128}-1$	bitcode of all input-registers in this task
unused_Regiser_BitCode	number	$1..2^{128}-1$	bitcode of all registers which should not be used
unused_Operation_BitCode	number	$0..2^{128}-1$	bitcode of all opcode-IDs which are not allowed to use in this task (default = $0000.0000:0000.0000)
aim_implement_solutions	long	String	string of the Aim_ID's (words) of earlier solutions, which could be implemented here.
aim_fulfill_valuation_mode	boolean	0\|1	mode of aim-valuation: 0 = SQL ; 1 = machine-code
aim_fulfilled_Flag_Function	varchar2(99)	≤99 Bytes	boolean aim-attained recognition-function as a string
aim_Valuation_FunctionID	signed short	0..32767	identifier of the valuation-function (see VFT)

Fig. 12

Functions-Identification-Table: *[FIT - table of the basic subfunctions used in the valuation-function]*

a.) for SQL-functions:

column:	*datatype*	*value-range*	*meaning:*
Function_ID *(PK)*	signed byte	-1..127	identification-number of the basic function
Function_BitCode	number(19)	$0..2^{64}-1$	bitcode of this basic function (only one bit is set)
Function_Name	char(5)	5 Bytes	function-name
Function_Type	byte	0..99	0 = value, 1 = unitary, 2 = binary, 3 = ternary, ...
Function_Flatten	signed byte	-127..127	degree of flattening [+ = steepening, − = flattening]
Function_Template	varchar2(99)	≤99 Bytes	SQL function-template
Function_Description	varchar2(99)	≤99 Bytes	optional description of the basic sub-function

Fig. 13a

F.ID	*Function_BitCode*	*F.Name*	*F.T.*	*F.F.*	*Function_Template*	*Function_Description*
0	1	NUM	0	0	<following_value>	a constant number follows
1	2	ENGY	0	0	ELT.*energy_after*	energy after execution
2	4	GRAD	0	0	ELT.*energy_after* −ELT.*energy_before*	energy-gradient
3	8	VALUE	0	0	CLT(n).<columnNr>	value in the following column-number (last row)
4	16	EREG	0	0	<EnergyRegister_ID>	ID of the energy-register
5	32	SGN	1	0	SIGN(%s)	algebraic sign
6	64	ROUND	1	0	ROUND(%s, 0)	rounded
7	128	INT	1	0	FLOOR(%s)	truncated after dec.point
8	256	ABS	1	0	ABS(%s)	amount
9	512	NEG	1	0	−(%s)	negation
10	1.024	ADD	2	1	((%s)+(%s))	addition
11	2.048	SUB	2	-1	((%s) − (%s))	subtraction
12	4.096	MUL	2	4	((%s) * (%s))	multiplication
13	8.192	DIV	2	-4	((%s) / (%s))	division
14	16.384	MOD	2	-2	MOD(%s, %s)	rest of division
15	32.767	SQRT	1	-8	SQRT(%s)	square-root
16	$1.0000	CBRT	1	-12	POWER(%s, 1/3)	cube-root
17	$2.0000	MIN	2	-10	LEAST(%s, %s)	minimum
18	$4.0000	MAX	2	-10	GREATEST(%s, %s)	maximum
19	$8.0000	LN	1	-48	LN(%s)	natural logarithm
20	$10.0000	EXP	1	48	EXP(%s)	nat. exponential-function
21	$20.0000	LD	1	-32	LOG(2, %s)	logarithm on base 2
22	$40.0000	POT2	1	32	POWER(2, %s)	2nd power of ...
23	$80.0000	SIN	1	-64	SIN(%s)	sine
24	$100.0000	COS	1	-64	COS(%s)	cosine
25	$200.0000	TAN	1	127	TAN(%s)	tangent
26	$400.0000	ASIN	1	127	ASIN(%s)	arc sine
27	$800.0000	ACOS	1	127	ACOS(%s)	arc cosine
28	$1000.0000	ATAN	1	-127	ATAN(%s)	arc tangent
29	$2000.0000	SINH	1	40	SINH(%s)	sine hyperbolic
30	$4000.0000	COSH	1	50	COSH(%s)	cosine hyperbolic
31	$8000.0000	TANH	1	-127	TANH(%s)	tangent hyperbolic
32	$1.0000.0000	LOG	2	-64	LOG(%s, %s)	logarithm
33	$2.0000.0000	POT	2	64	POWER(%s, %s)	n-th power of ...
34	$4.0000.0000	OR	2	1	((%s) \| (%s))	bitwise OR
35	$8.0000.0000	AND	2	-1	((%s) & (%s))	bitwise AND
36	$10.0000.0000	EQ	2	-127	DECODE(%s, %s, 1, 0)	equal
37	$20.0000.0000	LE	2	-127	DECODE(GREATEST(%s − %s, 0), 0, 1, 0)	less-equal
38	$40.0000.0000	GE	2	-127	DECODE(LEAST(%s −%s, 0), 0, 1, 0)	greater-equal
39	$80.0000.0000	FRAME	1	-10	GREATEST(LEAST(%s, +127), -128)	frame to signed-byte: max. = 127, min. = -128
40	$100.0000.0000	BITS	1	-64	(1 & %s) +(2 & %s)/2 +(4 & %s)/4 +(8 & %s)/8 +....	number of bits in the integer value
41	$200.0000.0000	S_REG	0	0	ADT.*all_source_Registers-_BitCode*	bitcode of the source-register
42	$400.0000.0000	D_REG	0	0	ADT.*all_dest_Registers_BitCode*	bitcode of dest.-register
43	$800.0000.0000	AIM_F	0	0	VAL(ADT.*aim_fulfilled_Flag-_Function*)	result of the boolean aim-fulfilled-function
...	...	...	..	...	...	...

Fig. 13b

b.) for machine-code functions:

column:	*datatype*	*value-range*	*meaning:*
Function_ID *(PK)*	signed byte	-1..127	identification-number of the basic function
Function_BitCode	number(19)	$0..2^{64}-1$	bitcode of this sub-function
Operations_BitCode	number	$0..2^{128}-1$	bitcode of the used opcodes in this function
Registers_BitCode	number	$0..2^{128}-1$	bitcode of the used registers in this function
Function_Name	char(5)	5 Bytes	short notation of this sub-function
Function_Type	byte	0..99	0 = value, 1 = unitary, 2 = binary, 3 = ternary, ...
Function_Flatten	signed byte	-128..127	degree of function-flattening ($1 \triangleq f(x) = x$)
Function_OpCodes	number	$1..2^{128}-1$	sub-function in machine-code
Function_Description	varchar2(99)	≤99 Bytes	optional description of the sub-function

Fig. 14a

Func.ID	***Func.BitCode***	***Oper.BitCode***	***Reg.BitCode***	***Func.Name***	***F.T.***	***Func.OpCodes***	***Function_Descript.***
0	1	$A000.4008	<energy>	FRAME	1	s.b. Func.1	prevent overflow
1	2	$28800.0009	<energy>	SGN	1	s.b. Func.2	signum
2	4	$0000.0002	<energy>	NEG	1	<NEG>	negation
3	8	$0000.0200	<energy>	MUL2	1	<SHLI>	division by 2
4	16	$0000.0400	<energy>	DIV2	1	<SHRI>	multiplication by 2
5	32	$0000.0100: 4A00.8018	⟨D0⟩\|⟨en⟩	ILOG2	1	s.b. Func.3	mogarithm dualis
6	64	$1000.C000: 0000.0000	⟨FP0⟩\|⟨en⟩	ISQRT	1	s.b. Func.4	square-root
7	128		s. 1.4.2	ICBRT	1	s.above 1.4.2	cube-root
8	256	$0000.8000	⟨en-1⟩\|⟨en⟩	MOV	2	<MOV>	copying of one reg. before energy-reg.
9	512	$0000.8000	⟨en-1⟩\|⟨en⟩	SWAP	2	s.b. Func.5	swap with reg. before energy-reg.
10	1024	$0001.0000	⟨en-1⟩\|⟨en⟩	ADD	2	<ADD>	addition with -"-
11	2048	$0002.0000	⟨en-1⟩\|⟨en⟩	SUB	2	<SUB>	subtraction of -"-
12	4096	$0004.0000	⟨en-1⟩\|⟨en⟩	MUL	2	<MUL>	multiplied with -"-
13	8192	$0008.0000	⟨en-1⟩\|⟨en⟩	DIV	2	<DIV>	division by -"-
...	...	...	...	...	..	...	...

Fig. 14b

Function:	***OpCodes of:*** *(machine-code compilation of these mnemonics, here a Motorola-Example)*
Func.1	CMPI 127,⟨E⟩ ; JLE ⟨+2⟩ ; MOVI #127,⟨E⟩ ; CMPI -128,⟨E⟩ ; JGE ⟨+2⟩ ; MOVI #-128,⟨E⟩
Func.2	TST ⟨E⟩ ; JGE ⟨+3⟩ ; MOVI #-1,⟨E⟩ ; JMP ⟨+5⟩ ; JGT ⟨+3⟩ ; MOVI #0,⟨E⟩ ; JMP ⟨+2⟩ ; MOVI #+1,⟨E⟩
Func.3	MOVI #31,D0 ; BTST D0,⟨E⟩ ; JEQ ⟨+3⟩ ; DJMP D0,⟨−2⟩ ; ADDI #1,D0 ; MOVE D0,⟨E⟩
Func.4	FILD ⟨E⟩ ; FSQRT ; FIST ⟨E⟩
Func.5	MOVE ⟨E-1⟩,−(A7) ; MOVE ⟨E⟩,⟨E-1⟩ ; MOVE (A7)+,⟨E⟩

Fig. 14c

Valuation-Function-Table: *[VFT - Table of the valuation-functions]*

column:	*datatype*	*value-range*	*meaning:*
Valuation_Function_ID *(PK)*	signed short	±32767	identifier of the valuation-function (energyspecif. neg.)
Valuation_Function_Type	char(1)	'E'\|'A'	'E'=energy-valuation, 'A'=valuation for reaching closeness to programming-aim, ... (maybe further)
Valuation_Function_Mode	boolean	0\|1	0=SQL-mode ; 1=machine-code mode
Valuation_Function	varchar2(99)	≤99 Bytes	valuation-function for energy- or aim-attainment
execution_counter	integer	$0\text{-}2^{32}\text{-}1$	number of uses of this valuation-function
used_Functions_BitCode	number(19)	$0..2^{64}\text{-}1$	BitCodes of all subfunctions
Function_ID_Chain	varchar2(99)	≤99 Bytes	chain of subfunctions (one byte ≙ one Function_ID)
avg_Func_execution_time	integer	$0\text{-}2^{32}\text{-}1$	average by val.-func.-execution needed clock-cycles
boundary_value_counter	integer	$0\text{-}2^{32}\text{-}1$	counter incremented if the result is -128 or +127
low_value_counter	integer	$0\text{-}2^{32}\text{-}1$	counter incremented if the result inside ±16
Valuation_Function_value	signed byte	-128..127	valuability of the valuation-function = SAC.*Self-_Valuation_Aim/Energy(Valuation_Function, Values)*

Fig. 15a *Initial Entries for Energy-Valuation and Aim-Closeness-Valuation:*

ID	Ty	M	Valuation_Function
-1	'E'	0	MAX[MIN[SGN(*EnergyReg'–EnergyReg°*) · SQRT(*EnergyReg'–EnergyReg°*) −32· Σ CLT(i).*Register_changed_BitCode* &(! 2^*Energy_Register_ID*) } , +127], -128]
0	'A'	0	MAX[MIN[16· Σ{ CLT(i).*Register_changed_BitCode* & ADT.*all_dest_Register_BitCode* } +16· Σ{ CLT(i).*Register_source_BitCode* & ADT.*all_source_Register_BitCode* } +32·ADT.*aim_fulfilled_Flag_Function*(Aim_ID) −CLT(i).*Processor_Mode_changed* −¼·CLT(i).*cycles_of_execution* −(CLT(i).*active*\|*inactive_ChkSum_corrupt*) −(CLT(i).*Exception_vect_changed*>0) −(CLT(i).*Number_of_Exception*>0) −½(CLT(i).*OpCode_length_or_jump* > 4 or ≤ 0), +127], -128]

ex#	used_F._BitCode	Function_ID_chain	ex.T	bdy#	low#	F.Val
0	$189.0040.983B	2,5; 2,15; 12; 4,22,3,11,35,40,1,32,12; 11 ; 39	0	0	0	0
0	$EE9.0001.3AAA	3,11,42,35,1,16,12; 3,12,41,35,1,16,12,10; 43,1,32,10, 3,7,11; 3,16,1,5,13,11; 3,3,11; 3,5,11 3,5,5,10; 3,8,5,10; 3,9,1,0,37,11;3,9,1,5,38,11;39	0	0	0	0

Fig. 15b

Status of the Artificial Consciousness: *[SAC - status-values of the AC-program (only 1 row)]*

column:	*datatype*	*value-range*	*meaning:*
Programm_StartDate	timestamp	datime	date and time of the start of the AC-program
actual_Processor_Mode	integer	$0\text{-}2^{32}\text{-}1$	flags above CCR \| control-register-bits
actual_CPT_index	byte	1..255	CBT(max(i)=*actual_CPT_Nr*) = actual CPT
CxT_counter	short	1..65535	number of creatings of the dynamic CxT-tables
Aims_total	short	1..65535	number of total programming-aims
Aims_soluted	short	0..65535	number of solved programming-aims
actual_Aim_ID	short	0..65535	ID of the actual programming-aim
Aim_Valuation_Mode	boolean	0\|1	mode of the programming-aim-specific valuation-function: 0=SQL-mode ; 1=machine-code mode
Aim_Valuation_FunctionID	signed short	0..32767	actual VFT.*Valuation_Function_ID* referring the closeness to the programming-aim
Aim_Self_Valuation_Func	varchar2 (400)	max.400 Chars.	PL/SQL-valuation-function referring the efficiency of the valuation-function
Energy_Valuation_Mode	boolean	0\|1	mode of the energyspecific valuation-function 0=SQL-mode ; 1=machine-code mode
Energy_Valuation_Func_ID	signed short	-1..-32768	actual VFT.*Valuation_Function_ID* for energy-valuation
Energy_Self_Valuation_Func	varchar2 (400)	max.400 Chars.	PL/SQL-valuation-function referring the efficiency of the energyspecific valuation-function
max_Valuation_Function	signed short	0..32767	highest ID of all valuation-functions in the VFT.
min_Valuation_Function	signed short	-1..-32768	lowest ID of all valuation-functions in the VFT.

Fig. 16

DE 19823116 A1 1999.12.09

Energy-Learn-Table: *[ELT - appraises energyspecific actions in dependence of the used initial-conditions]*

column:	*datatype*	*value-range*	*meaning:*
Energy_action *(PK)*	number	$0..2^{128}-1$	max.16 byte opcode-combination of the action which changed the energy-register.
IniConNr *(PK)*	signed byte	-31..30	number of the used initial condition
Energy_before	integer	$0..2^{32}-1$	energy-register before execution
Energy_after	integer	$0..2^{32}-1$	energy-register after execution
min_Operations_BitCode	number	$0..2^{128}-1$	bitcode of the probably used opcodes.
max_Operations_BitCode	number	$0..2^{128}-1$	bitcode of the possibly used opcodes.
Register_changed_BitCode	number	$1..2^{128}-1$	bitcode of the by action changed registers.
Register_source_BitCode	number	$1..2^{128}-1$	bitcode of the probable source-registers.
used_cycles_of_execution	short	1..65535	needed clock cycles for the energyspecific action
Energy_valuation	signed byte	-128..127	result of the actual *VFT.Energy_valuation_Function*
Valuation_Function_ID	signed short	-1..-32768	used energyspecific valuation-function

Fig. 17

Energy-Base-Table: *[EBT - evaluation of the energyspecific actions]*

column:	*datatype*	*value-range*	*meaning:*
Energy_action *(PK)*	number	$0..2^{128}-1$	max.16 byte opcode-combination of the action which changed the energy-register.
Execution_counter	byte	0..255	number of the ELT-entries until now.
FatalError_counter	byte	0..255	number of the occurred fatal errors: fatal errors correlate the columns 3-7 of the above learn-table, except *Divide-Error* or *Overflow-Exc.*
low_Error_counter	byte	0..255	number of *Divide-Errors* or *Overflow* -Exceptions
avg_Energy_after	integer	$0..2^{32}-1$	average energy-value after the action
all_Reg_dest_BitCode	number	$0..2^{128}-1$	Ξ ELT.Register_changed_Bitcode $\forall$ ELT(OpCode)
cut_Reg_dest_BitCode	number	$0..2^{128}-1$	ζ ELT.Register_changed_Bitcode $\forall$ ELT(OpCode)
all_Reg_source_BitCode	number	$0..2^{128}-1$	Ξ ELT.Register_source_Bitcode $\forall$ ELT(OpCode)
cut_Reg_source_BitCode	number	$0..2^{128}-1$	ζ ELT.Register_source_Bitcode $\forall$ ELT(OpCode)
max_Operation_BitCode	number	$0..2^{128}-1$	Ξ ELT.max_Operation_BitCode $\forall$ ELT(OpCode)
min_Operation_BitCode	number	$0..2^{128}-1$	ζ ELT.min_Operation_BitCode $\forall$ ELT(OpCode)
all_Operation_BitCode	number	$0..2^{128}-1$	Ξ ELT.min_Operation_BitCode $\forall$ ELT(OpCode)
cut_Operation_BitCode	number	$0..2^{128}-1$	ζ ELT.max_Operation_BitCode $\forall$ ELT(OpCode)
max_write_value	integer	$0..2^{32}-1$	maximum of all energy-values after energy-action
min_write_value	integer	$0..2^{32}-1$	minimum of all energy-values after energy-action
avg_write_value	integer	$0..2^{32}-1$	average of all energy-values after energy-action
max_write_gradient	integer	$0..2^{32}-1$	maximum gradient of the changes energy-register
min_write_gradient	integer	$0..2^{32}-1$	minimum gradient of the changes energy-register ##
avg_write_gradient	integer	$0..2^{32}-1$	average gradient of the changes energy-register
equal_value_probability	signed byte	-128..127	probability of equal result of energyspecific action
avg_Energy_gradient	signed int	$\pm 2^{31}$	average value-gradient of this energyspecific action
equal_Gradient_probability	signed byte	-128..127	probability: gradient is constant
avg_cycles_of_execution	short	1..65535	average needed clock cycles for this action
avg_Energy_valuation	signed byte	-128..127	result of the actual *VFT.Energy_valuation_Function*
Valuation_Function_ID	signed short	-1..-32768	ID of the used energy-valuation-function

Fig. 18

3.2 Flowchart of the AC-Program:

3.2.1 CxT(i) value assignments:

ORT & CRT(i) value assingments:

ORT.Register_ID_dest := $\log_2$(*Bit*(OLT.Register_changed_Mask), *of the regarded changing*)
ORT.Register_ID_source := Register_ID(C°), if ORT.calculation_code > 0, *otherwise* -1
ORT.value_before_change := value(Register_ID_dest), *before opcode-execution*
ORT.value_after_change := value(Register_ID_dest), *after opcode-execution*
ORT.gradient_if_signed := MAX[MIN[ORT.value_after_change - ORT.value_before_change, +127], -128]
ORT.gradient_if_unsigned := MAX[MIN[ORT.value_after_change - ORT.value_before_change, +127], -128]
ORT.Operation_BitCode := $1\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[NF&&(V_I° < 0) \|\| ZF&&(V_I° = 0)] $+2\cdot[(V_I' = -V_I°)\&\&\forall^-(V'=V°)] + 4\cdot[(V_I' = \sim V_I°)\&\&\forall^-(V'=V°)] + 8\cdot[(V_I' = OLB)\&\&\forall^-(V'=V°)]$ $+16\cdot[(V_I' = V_I° + OLB)\&\&\forall^-(V'=V°)] + 32\cdot[(V_I' = V_I° - OLB)\&\&\forall^-(V'=V°)] + 64\cdot[(V_I' = V_I° \cdot OLB)\&\&\forall^-(V'=V°)]$ $+128\cdot[(V_I' = V_I° / OLB)\&\&\forall^-(V'=V°)] + 256\cdot[(V_I' = V_I° \,\%\, OLB)\&\&\forall^-(V'=V°)] + 512\cdot[(V_I' = V_I° \cdot 2\hat{}OLB)\&\&\forall^-(V'=V°)]$ $+2^{10}\cdot[(V_I' = V_I° / 2\hat{}OLB)\&\&\forall^-(V'=V°)] + 2^{11}\cdot[(V_I' = V_I° \,	\, OLB)\&\&\forall^-(V'=V°)] + 2^{12}\cdot[(V_I' = V_I° \,\&\, OLB)\&\&\forall^-(V'=V°)]$ $+2^{13}\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[(ZF=1)&&($2\hat{}OLB \,	\, \sim V°$) \|\| (ZF=0)&&!($2\hat{}OLB \,	\, V_I°$)] $+2^{14}\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[NF&&(V_I° < OLB) \|\| ZF&&(V_I° = OLB)] $+ 2^{15}\cdot[(V_I' = C_I°)\&\&\forall^-(V'=V°)]$ $+2^{16}\cdot[(V_I' = V_I° + C_I°)\&\&\forall^-(V'=V°)] + 2^{17}\cdot[(V_I' = V_I° - C_I°)\&\&\forall^-(V'=V°)] + 2^{18}\cdot[(V_I' = V_I° \cdot C_I°)\&\&\forall^-(V'=V°)]$ $+2^{19}\cdot[(V_I' = V_I° / C_I°)\&\&\forall^-(V'=V°)] + 2^{20}\cdot[(V_I' = V_I° \,\%\, C°)\&\&\forall^-(V'=V°)] + 2^{21}\cdot[(V_I' = 2^{C°} \cdot V_I°)\&\&\forall^-(V'=V°)]$ $+2^{22}\cdot[(V_I' = V_I° / 2^{C°})\&\&\forall^-(V'=V°)] + 2^{23}\cdot[(V_I' = V_I° \,	\, C_I°)\&\&\forall^-(V'=V°)] + 2^{24}\cdot[(V_I' = V_I° \,\&\, C_I°)\&\&\forall^-(V'=V°)]$ $+2^{25}\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[(ZF=1)&&($2\hat{}C_I° \,	\, \sim V_I°$) \|\| (ZF=0)&&!($2\hat{}C_I° \,	\, V_I°$)] $+2^{26}\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[NF&&(V_I° < C_I°) \|\| ZF&&(V_I° = C_I°)] $+2^{27}\cdot[(IP' \le IP°) \,		\, (IP' > IP° + 4)]\&\&$(Flags'=Flags°)&&∀(V'=V°) $+2^{28}\cdot[(IP' \le IP°) \,		\, (IP' > IP° + 4)]\&\&$(Flags'=Flags°)&&∀(V'=V°)&&(NF&!VF \| !NF&VF) + ...∀**Jcc**(CCR) $+2^{40}\cdot\{[(IP' \le IP°) \,		\, (IP' > IP° + 4)]\&\&(V_I' = V_I° - 1) \,		\, (V_I' = -1)\}\&\&$(Flags'=Flags°)&&∀(V'=V°) $+2^{41}\cdot[($ IP'=IP° ± OLB)&&((SP) = IP°)&&(Flags'=Flags°)&&$\forall^-$(V'=V°) $+2^{42}\cdot[($ IP'=-4(SP))&&(Flags'=Flags°)&&∀(V'=V°) $+ 2^{43}\cdot[(V_I' \neq V_I°)\&\&($! other_Integer_Operation_BitCode)] $+2^{44}\cdot[(V_F' \neq V_F°)\&\&($! other_FloatingPoint_Operation_BitCode)] $+ 2^{45}\cdot[$(CCR-Flags'=0)&&∀(V_F' = 0)]$\cdot$ $+2^{46}\cdot[(V_I' = C_F°)\&\&\forall^-(V'=V°)] + 2^{47}\cdot[(V_F' = C_I°)\&\&\forall^-(V'=V°)] + 2^{48}\cdot[(V_F' = V_F° + C_I°)\&\&\forall^-(V'=V°)]$ $+2^{49}\cdot[(V_F' = V_F° - C_I°)\&\&\forall^-(V'=V°)] + 2^{50}\cdot[(V_F' = V_F° \cdot C_I°)\&\&\forall^-(V'=V°)] + 2^{51}\cdot[(V_F' = V_F° / C_I°)\&\&\forall^-(V'=V°)]$ $+2^{52}\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[NF&&(V_F° < C_I°) \|\| ZF&&(V_F° = C_I°)] $+2^{53}\cdot[$ (V_F' = 1.0) \|\| (V_F' = 0.0) \|\| (V_F' = π) \|\| (V_F' = e)]&&$\forall^-$(V'=V°) $+2^{54}\cdot[(V_F' = -V_F°)\&\&(V_F° < 0)\&\&\forall^-(V'=V°)] + 2^{55}\cdot[(V_F' = C_F°)\&\&\forall^-(V'=V°)]$ $+2^{56}\cdot[(V_F' = V_F° + C_F°)\&\&\forall^-(V'=V°)] + 2^{57}\cdot[(V_F' = V_F° - C_F°)\&\&\forall^-(V'=V°)]$ $+2^{58}\cdot[(V_F' = V_F° \cdot C_F°)\&\&\forall^-(V'=V°)] + 2^{59}\cdot[(V_F' = V_F° / V_F°)\&\&\forall^-(V'=V°)] + 2^{60}\cdot[(V_F' \cdot V_F' = V_F°)\&\&\forall^-(V'=V°)]$ $+2^{61}\cdot[V_F' = \sin(V_F°)]\&\&\forall^-(V'=V°) + 2^{62}\cdot[V_F' = \cos(V_F°)]\&\&\forall^-(V'=V°) + 2^{63}\cdot[(V_F' = \text{atan}(V_F°))\&\&\forall^-(V'=V°)]$ $+2^{64}\cdot[(V_F' = V_F° \cdot 2\hat{}V_{F-1}°)\&\&\forall^-(V'=V°)] + 2^{65}\cdot[(V_F' = V_{F-1} \cdot \log_2(V_F°)\&\&\forall^-(V'=V°)]$ $+2^{66}\cdot$(Flags'≠Flags°)&&∀(V'=V°)&&[NF&&(V_F° < C_F°) \|\| ZF&&(V_F° = C_F°)] $+ 2^{67}\cdot[(V_I' = C_ŝ°)\&\&\forall^-(V'=V°)]$ $+2^{68}\cdot[(V_ŝ' = C_I°)\&\&\forall^-(V'=V°)] + ...$, where V'=value_after_change (¬Flags), V°=value_before_change C°=value(Register_ID_source). Here has to be checked over all Register_ID_source(eq.kind). Though equal Register-ID's in the PK several bits can be set. [p.e. because 4 = 2 + 2 = 2 * 2 = SHL(2) = ...]

Fig. 19

OLT & CLT(i) value assingments:

OLT.Processor_Mode_Changed := $\bigcap${ EFlags$_{\pi}$/SR$_{\mu}$ & ! Ξ 2^CCR_Flags } > 0 \|\| ORT.value_after_change(Register_ID *of a special-register*)
OLT.aim_valuation := VFT.Aim_Valuation_Function(SAC.Aim_Valuation_FunctionID, ORT.xxxxx, Registers_changed_BitCode, Registers_source_BitCode, min_Operations_BitCode, max_Operations_BitCode, used_cycles_of_execution, ...)
CLT(n).gradient_aim_valuation := CLT(n).aim_valuation – CLT(n-1).aim_valuation
all other column-assignments are declared adequate in the OLT-description in fig.6.

Fig.20

OBT & CBT(i) value-assingments:

OBT.Execution_counter := Execution_counter+1
OBT.FatalError_counter := FatalError_counter +(0 < OLT.Number_of_Exception ≠ Divide_Error, Overflow) \|\| OLT.active_ChkSum_corrupt \|\| OLT.inactive_ChkSum_corrupt \|\| OLT.Exception_vect_changed \|\| OLT.Processor_Mode_changed)
OBT.Jump_longOp_probability := MAX[MIN[Jump_probability +(OLT.OpCode_length_or_jump ≤ 0) +(OLT.OpCode_length_or_jump>4), +127], -128]
OBT.avg_OpCode_jump_length := (execution_counter*avg_OpCode_jump_length +akt.OpCode_jump_length) / (execution_counter+1)
OBT.OpCode_len_unconfirmed := OpCode_len_unconfirmed \|\| (avg_OpCode_length ≠ act.OpCode_length)
OBT.avg_cycles_of_execution := (execution_counter * avg_cycles_of_execution + act.cycles_of_execution) / (execution_counter+1)
OBT.exec_cycles_unconfirmed := exec_cycles_unconfirmed \|\| (avg_cycles_of_execution ≠ act.cycles_of_execution)
OBT.Register_write_probability := MAX[MIN[Register_write_probability +2*[(min.Reg.ID ≤ ORT.Column_ID_OLT ≤ max.Reg.ID)&& ORT.value_before_change ≠ ORT.value_after_change] -1, +127], -128]
OBT.Register_copy_probability := MAX[MIN[MIN(Register_copy_probability +2*[(min.Reg.ID ≤ ORT.Column_ID_OLT ≤ max.Reg.ID)&& ORT.value_before_change ≠ ORT.value_after_change &&(min.Reg.ID ≤ ORT.Column_ID_source ≤ max.Reg.ID)] -1, +127], -128]
OBT.Memory_write_probability := MAX[MIN[Memory_write_probability +2*[(min.Adr.Reg.ID ≤ ORT.Column_ID_OLT ≤ max.Adr.Reg.ID)&& ORT.value_before_change ≠ ORT.value_after_change] -1, +127], -128]
OBT.Memory_copy_probability := MAX[MIN[Memory_copy_probability +2*[(min.Adr.Reg.ID ≤ ORT.Column_ID_OLT ≤ max.Adr.Reg.ID)&& ORT.value_before_change ≠ ORT.value_after_change &&(min.Adr.Reg.ID ≤ ORT.Column_ID_source ≤ max.Adr.Reg.ID)] -1, +127], -128]
OBT.Reg_to_Mem_probability := MAX[MIN[Reg_to_Mem_probability +2*[(min.Adr.Reg.ID ≤ ORT.Column_ID_OLT ≤ max.Adr.Reg.ID)&& ORT.value_before_change ≠ ORT.value_after-_change &&(min.Reg.ID ≤ ORT.Column_ID_source ≤ max.Reg.ID)] -1, +127], -128]
OBT.Mem_to_Reg_probability := MAX[MIN[Mem_to_Reg_probability +2*[(min.Reg.ID ≤ ORT.Column_ID_OLT ≤ max.Reg.ID)&& ORT.value_before_change ≠ ORT.value_after_change &&(min.Adr.Reg.ID ≤ ORT.Column_ID_source ≤ max.Adr.Reg.ID)] -1, +127], -128]
OBT.Multi_Reg_write_prob := *like in* Register_write_probability , *but with min.2 appropriate* ORT.Column_ID_OLT *-entries*.
OBT.Multi_Mem_write_prob := *like in* Memory_write_probability , *but with min.2 appropriate* ORT.Column_ID_OLT *-entries*.
OBT.Multi_Reg_to_Mem_prob := *like in* Reg_to_Mem_probability , *but with min.2 appropriate* ORT.Column_ID_OLT+Column_ID_source *-entries*.
OBT.Multi_Mem_to_Reg_prob := *like in* Mem_to_Reg_probability , *but with min.2 appropriate* ORT.Column_ID_OLT+Column_ID_source *-entries*.
OBT.xxx_Reg_source\|dest_BitCode: *see table-description*
OBT.xxx_calculation_BitCode: *see table-description*
OBT.max_write_value := MAX(max_write_value, ORT.value_after_change)
OBT.min_write_value := MIN(min_write_value, ORT.value_after_change)
OBT.avg_write_value := (execution_counter * avg_write_value + ORT.value_after_change) / (execution_counter+1)
OBT.max_write_gradient := MAX(max_write_gradient, ORT.value_after_change - ORT.value_before_change)
OBT.min_write_gradient := MIN(min_write_gradient, ORT.value_after_change - ORT.value_before_change)
OBT.avg_write_gradient := (execution_counter * avg_write_gradient + ORT.value_after_change - ORT.value_before_change) / (execution_counter+1)
OBT.evaluated_source_[Num]Register := *probability-function*(xxx_Reg_source_BitCode, confirmation_counter)

OBT.evaluated_dest_Register[2] := *probability-function*(xxx_Reg_dest_BitCode, confirmation-counter)
OBT.evaluated_Operation_ID := *probability-function*(xxx_Operation_BitCode, confirmation-counter)
OBT.Confirmation_counter := Confirmation_counter+*exist*(*equivalent* OLT+ORT-*eintry with lower* IniConNr)
OBT.max_aim_valuation := MAX(max_aim_valuation, OLT.aim_valuation)
OBT.avg_aim_valuation := (execution_counter * avg_aim_valuation + OLT.aim_valuation) / (execution_counter+1)
CBT(n).max_grad_aim_valuation := MAX(CBT(n)max_aim_valuation, CLT(n).aim_valuation) – CBT(n-1).max_aim_valuation.
CBT(n).avg_grad_aim_valuation := (execution_counter * CBT(n).avg_aim_valuation +CLT(n).aim_valuation) / (execution_counter+1) – CBT(n-1).avg_grad_aim_valuation

Fig.21

3.2.2 ELT and EBT value-assignments:

ELT.max_Operations_BitCode := OLT.max_Operations_OpCode
ELT.min_Operations_BitCode := OLT.min_Operations_OpCode
ELT.Register_changed_BitCode := OLT.Registers_changed_BitCode
ELT.Register_source_BitCode := OLT.Registers_source_BitCode
ELT.Energy_Valuation := VFT.Energy_valuation_Function(SAC.Energy_Valuation_FunctionID, Energy_after, Energy_before, Registers_changed_BitCode, Registers_source_BitCode, min_Operations_BitCode, max_Operations_BitCode, used_cycles_of_execution, ...)
ELT.Valuation_Function_ID := *for calculation of* Energy_Valuation *used* VFT.Valuation_Function_ID
EBT.avg_Energy_after := (execution_counter · avg_Energy_after + ELT.Energy_after) / (execution_counter+1)
EBT.equal_value_probability := equal_value_probability + 2·(avg_Energy_after = ELT.Energy_after) -1
EBT.avg_Energy_gradient := (execution_counter · avg_Energy_gradient + ELT.Energy_after - ELT.Energy_before) / (execution_counter+1)
EBT.equal_gradient_probability := equal_gradient_probability + 2·(avg_Energy_gradient = ELT.Energy_after–ELT.Energy_before) -1
EBT.xxx_Operations\|Registers_BitCode *see table-description*
EBT.avg_cycles_of_execution := (execution_counter · avg_cycles_of_execution + ELT.used_cycles-_of_execution) / (execution_counter+1)
EBT.avg_Energy_Valuation := (execution_counter · avg_Energy_Valuation + ELT.Energy_valuation) / (execution_counter+1)

Fig.22

3.2.3 Definitions needed to read the flowchart:

directives denotes a directive or a short sequence of directives.
⟨ *condition fulfilled ?* ⟩ *Yes:* branches horizontally, *No:* continue below.
(***continuing-label***) denotes a label to or from another part of the flowchart.
block of directives denotes a block of earlier defined directives.

In the flowchart because of the complexity not all things are described until the smallest detail, but the fundamental functionality is presented clear and comprehensible.
Self-evident things like closing a database-cursor or cofilling not explicit mentioned but existing table-columns (which do not need a special algorithm) are not performed additionally, because the meaning of these columns is already declared in 3.1.2 an their assignment-formulas in 3.2.1 or in 3.2.2.
In the flowchart means *"generate ORT-entry and actualise OBT"* what is already shown in the value-assignments in fig. 19-21.

Fig.23

3.2.4 AC-flowchart:

a.) Initial Preparations:

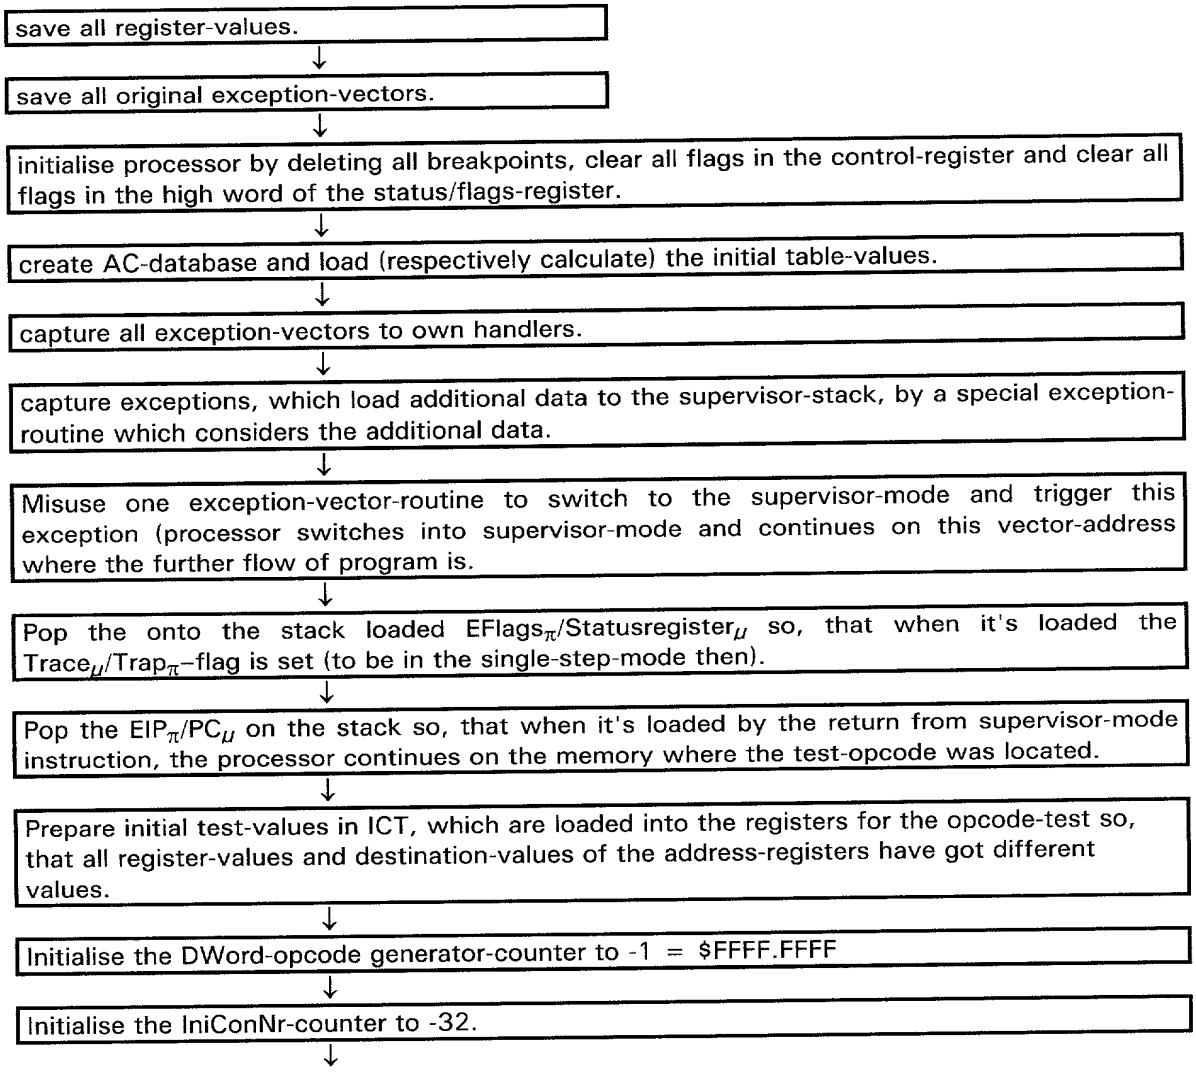


Fig.24a

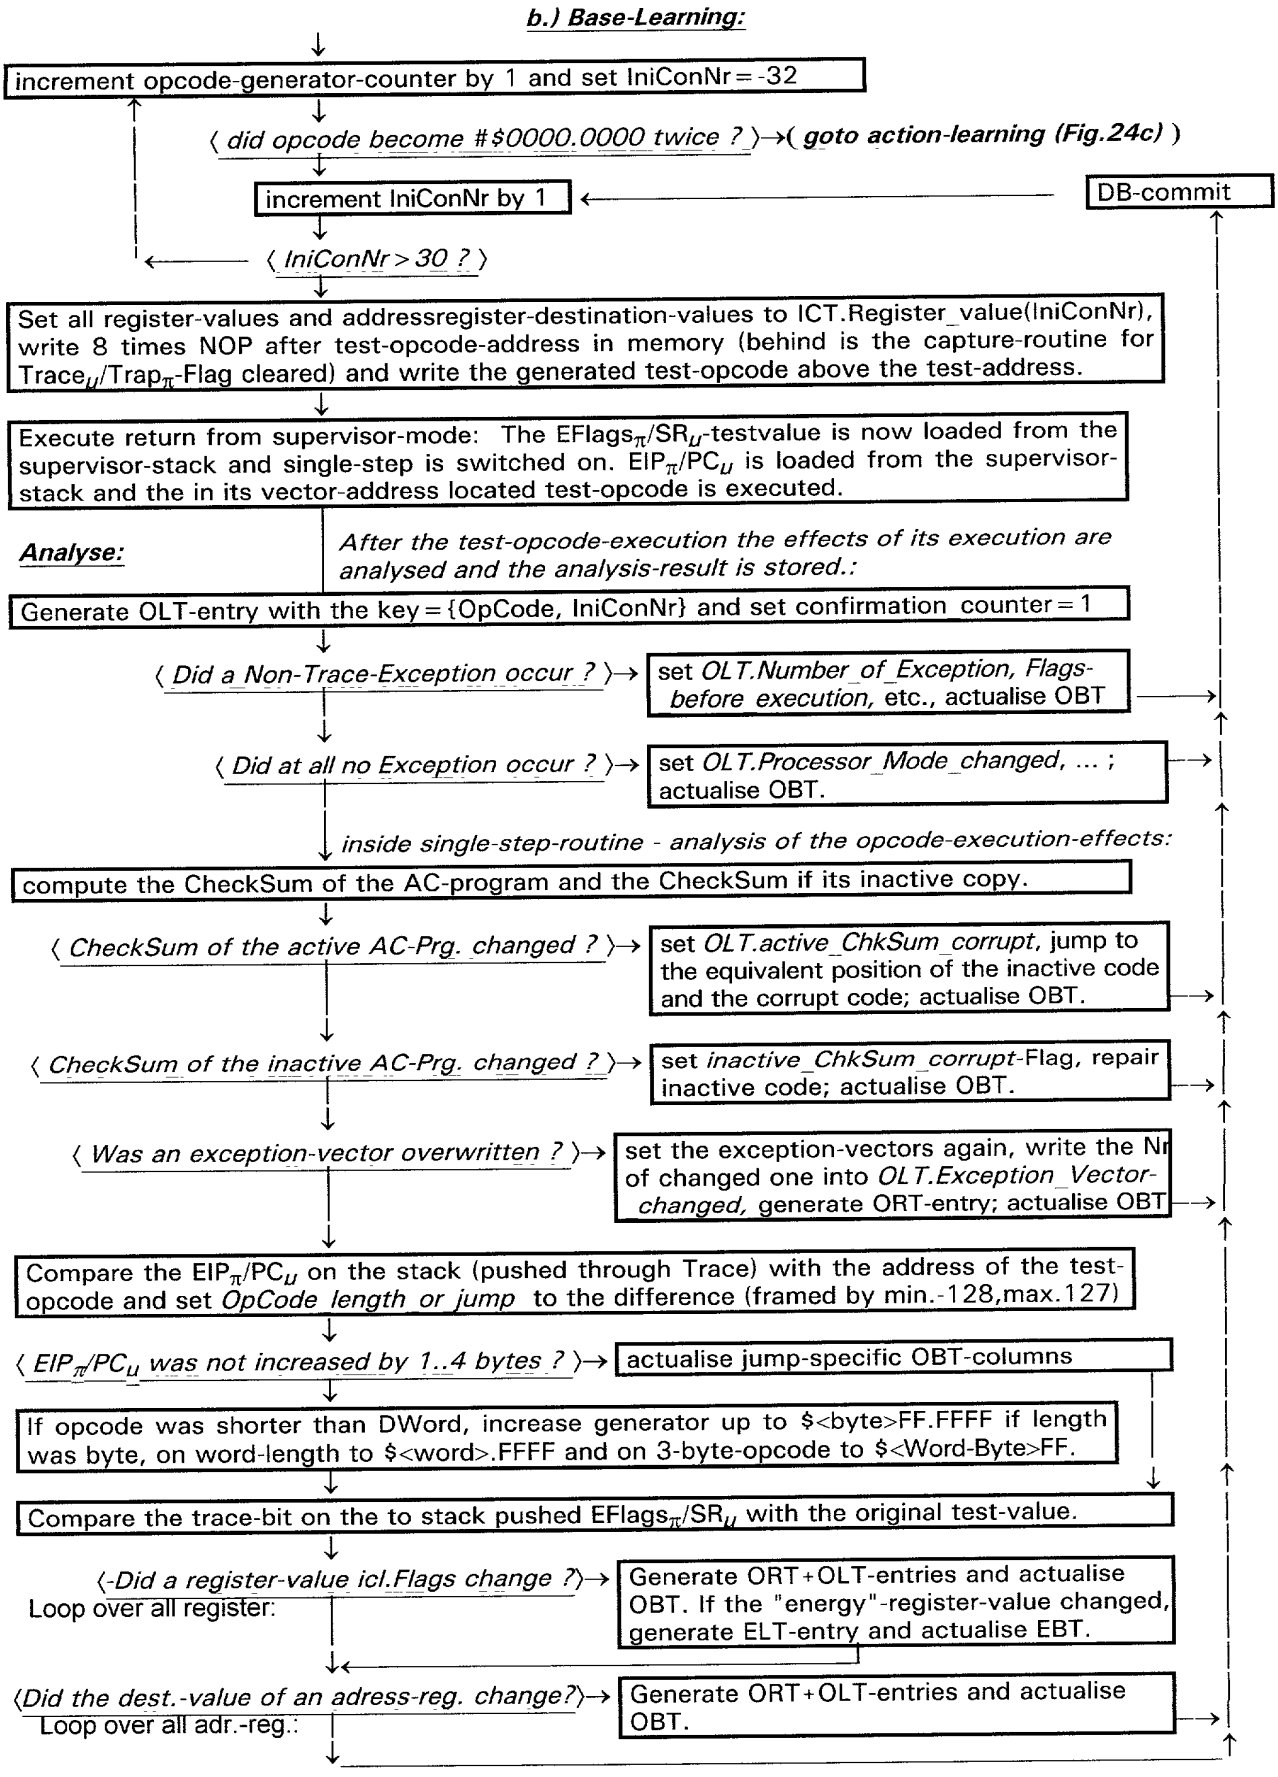

b.) Base-Learning:
increment opcode-generator-counter by 1 and set IniConNr = -32
⟨ did opcode become #$0000.0000 twice ? ⟩→(goto action-learning (Fig.24c))
increment IniConNr by 1
DB-commit
⟨ IniConNr > 30 ? ⟩
Set all register-values and addressregister-destination-values to ICT.Register_value(IniConNr), write 8 times NOP after test-opcode-address in memory (behind is the capture-routine for Trace$_\mu$/Trap$_\pi$-Flag cleared) and write the generated test-opcode above the test-address.
Execute return from supervisor-mode: The EFlags$_\pi$/SR$_\mu$-testvalue is now loaded from the supervisor-stack and single-step is switched on. EIP$_\pi$/PC$_\mu$ is loaded from the supervisor-stack and the in its vector-address located test-opcode is executed.
Analyse:
After the test-opcode-execution the effects of its execution are analysed and the analysis-result is stored.:
Generate OLT-entry with the key = {OpCode, IniConNr} and set confirmation_counter = 1
⟨ Did a Non-Trace-Exception occur ? ⟩→
set OLT.Number_of_Exception, Flags-before_execution, etc., actualise OBT
⟨ Did at all no Exception occur ? ⟩→
set OLT.Processor_Mode_changed, ... ; actualise OBT.
inside single-step-routine - analysis of the opcode-execution-effects:
compute the CheckSum of the AC-program and the CheckSum if its inactive copy.
⟨ CheckSum of the active AC-Prg. changed ? ⟩→
set OLT.active_ChkSum_corrupt, jump to the equivalent position of the inactive code and the corrupt code; actualise OBT.
⟨ CheckSum of the inactive AC-Prg. changed ? ⟩→
set inactive_ChkSum_corrupt-Flag, repair inactive code; actualise OBT.
⟨ Was an exception-vector overwritten ? ⟩→
set the exception-vectors again, write the Nr of changed one into OLT.Exception_Vector-changed, generate ORT-entry; actualise OBT
Compare the EIP$_\pi$/PC$_\mu$ on the stack (pushed through Trace) with the address of the test-opcode and set OpCode_length_or_jump to the difference (framed by min.-128,max.127)
⟨ EIP$_\pi$/PC$_\mu$ was not increased by 1..4 bytes ? ⟩→
actualise jump-specific OBT-columns
If opcode was shorter than DWord, increase generator up to $<byte>FF.FFFF if length was byte, on word-length to $<word>.FFFF and on 3-byte-opcode to $<Word-Byte>FF.
Compare the trace-bit on the to stack pushed EFlags$_\pi$/SR$_\mu$ with the original test-value.
⟨-Did a register-value icl.Flags change ?⟩→
Loop over all register:
Generate ORT+OLT-entries and actualise OBT. If the "energy"-register-value changed, generate ELT-entry and actualise EBT.
⟨Did the dest.-value of an adress-reg. change?⟩→
Loop over all adr.-reg.:
Generate ORT+OLT-entries and actualise OBT.

Fig.24b

c.) Double-OpCode-Acting:

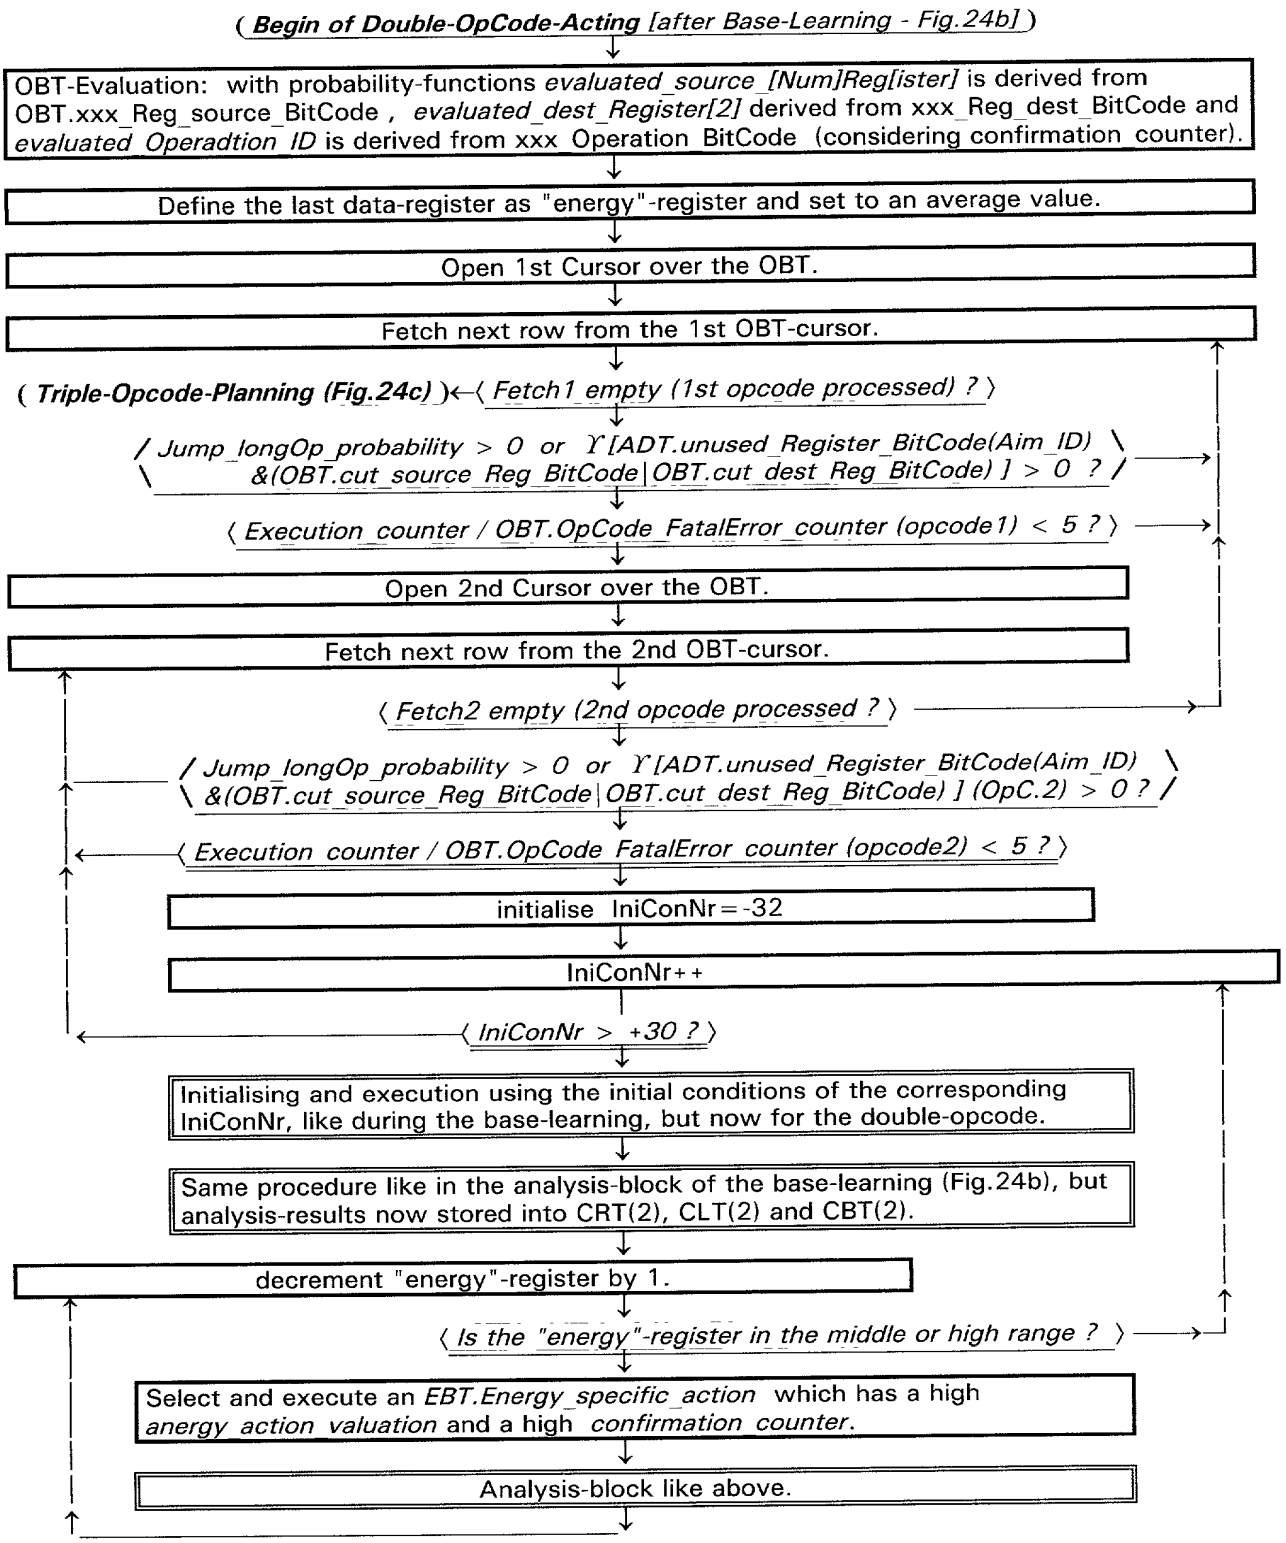


Fig.24c

d.) Triple-OpCode-Planning:

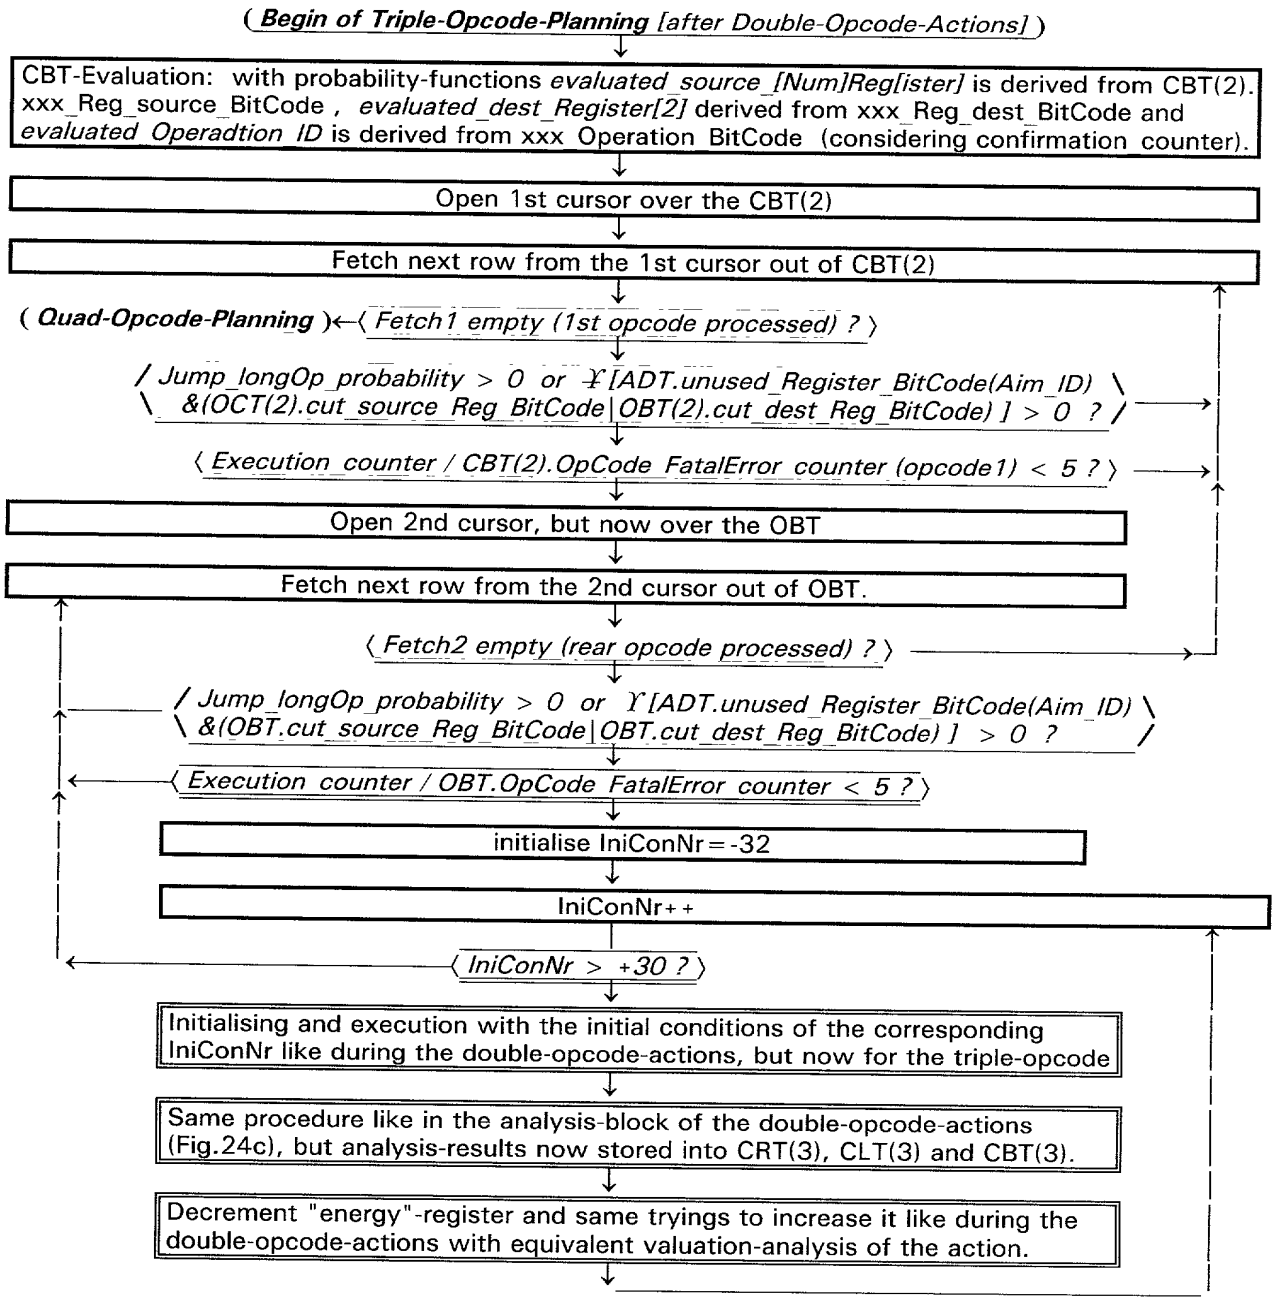


Fig.24d

Procedure for higher combinations analogous, using CxT(n), where n=sum_of_opcodes.

PTO/SB/103 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

Declaration and Power of Attorney for Patent Application
Erklärung für Patentanmeldungen mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Method for generating a simple kind of Artificial Consciousness in a computer, which has the capability to plan, generate automatically and execute machine-code for the solution of arbitrary programming-abandonments.
(Automatic Programming)

deren Beschreibung hier beigefügt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

☐ wurde angemeldet am _____
unter der US-Anmeldenummer oder unter der Internationalen Anmeldenummer im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT)
_____ und am
_____ abgeändert (falls zutreffend).

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____
as United States Application Number or PCT International Application Number
_____ and was amended on
_____ (if applicable).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebenen Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

PTO/SB/103 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslands- anmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Applications
(Frühere ausländische Anmeldungen)

Priority Not Claimed
Priorität ~~nicht~~ beansprucht

(Number) (Nummer)	(Country) (Land)	(Day/Month/Year Filed) (Tag/Monat/Jahr der Anmeldung)	
19952587.0-53	Germany	02. Nov. 1999	☐ I claim foreign priority
/	/	/	☐

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s)listed below.

(Application No.) (Aktenzeichen)	(Filing Date) (Anmeldetag)
/	/
/	/

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesen (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application

(Application No) (Aktenzeichen)	(Filing Date) (Anmeldetag)	(Status) (patented, pending, abandoned) (Status) (patentiert, schwebend, aufgegeben)
/	/	/
/	/	/

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden konnen und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

PTO/SB/103 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

German Language Declaration

VERTRETUNGSVOLMACHT: Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: *(Name(n) und Registrationsnummer(n) auflisten)*

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*

No Attorney

Postanschrift:

Send Correspondence to:

Telefonische Auskünfte: *(Name und Telefonnummer)*

Direct Telephone Calls to: *(name and telephone number)*


Vor- und Zuname des einzigen oder ersten Erfinders Gerd Krämer	Full name of sole or first inventor Gerd Krämer
Unterschrift des Erfinders G. Krämer Datum 29.10.00	Inventor's signature G. Krämer Date 29.10.00
Wohnsitz D-69181 Leimen	Residence D-69181 Leimen
Staatsangehörigkeit deutsch	Citizenship german
Postanschrift Richard-Wagner-Str. 16	Post Office Address Richard-Wagner-Str. 16
D-69181 Leimen, Germany	D-69181 Leimen, Germany
Vor- und Zuname des zweiten Miterfinders (falls zutreffend)	Full name of second joint inventor, if any
Unterschrift des zweiten Erfinders Datum	Second Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

(Im Falle dritter und weiterer Miterfinder sind die entsprechenden Informationen und Unterschriften hinzuzufügen.)

(Supply similar information and signature for third and subsequent joint inventors.)

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

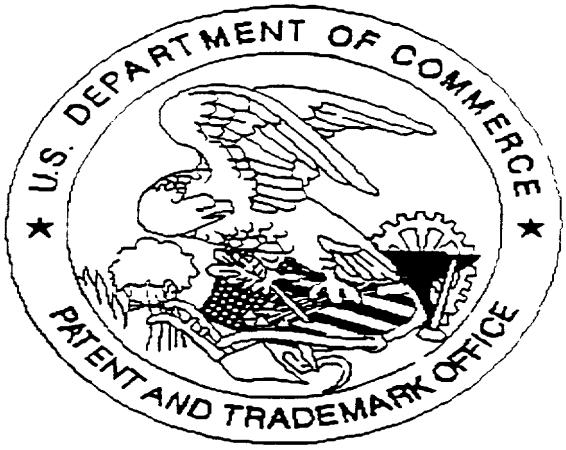

SCANNED, #_14

Application deficiencies were found during scanning:

☐ Page(s)_____ of small entity statement were not present for scanning.
(Document title)

☐ Page(s)_____ of _____ were not present for scanning.
(Document title)

☐ Scanned copy is best available.